

marantz®

model PM551/PM451

Stereo Amplifier

MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, MARANTZ company has created the ultimate in stereo sound.

Only **original MARANTZ parts** can insure that your MARANTZ product will continue to perform to the specifications for which it is famous.

Parts for your MARANTZ equipment are generally available to our National Marantz Subsidiary or Agent.

ORDERING PARTS:

Parts can be ordered either by mail or by telex. In both cases, correct part number has to be specified. If you order by mail, fulfil MARANTZ order forms.

The following information must be supplied to eliminate delays in processing your order:

1. Complete address
2. Complete part numbers and quantities required
3. Description of parts
4. Model number for which part is required
5. Way of shipment
6. Signature: any order form or telex must be signed otherwise such part order will be considered as null and void.

PARTS ORDERING

Parts may be ordered at the following addresses:

AUSTRIA
HORNYPHON
Vertriebsgesellschaft GmbH
Wienerbergstrasse 1
A 1101 Wien
Austria
Telex: 132.332

AUSTRALIA
MARANTZ AUSTRALIA
PTY., Ltd.
19 Chard Road
Brookvale, NSW 2100
Australia
Telex: 24121

BELGIUM
SVD DIVISION MARANTZ
Industrialaan 1
1720 Groot-Bijgaarden
Belgium
Telex: 24466

CHILE
MARANTZ
DIVISION OF PHILIPS S.A.
AV. Santa Maria, 0760
Casilla 2687
Santiago
Telex: 240.239

DENMARK
MARANTZ
DIVISION OF PHILIPS
SERVICE A/S
Prags Boulevard 80
Postbox 1919
DK-2300 København S
Denmark
Telex: 31201

EIRE
MARANTZ IRELAND Ltd.
Newstead
Glouceagh
Dublin 4
Telex: 25200

FINLAND
MARANTZ
DIVISION OF OY PHILIPS Ab
Kaivokatu 8
00100 Helsinki
Finland
Telex: 124811

FRANCE
MARANTZ FRANCE
4 Rue Bernard Palissy
92600 Asnières
France
Telex: 611651

GERMANY
MARANTZ GERMANY GmbH
Max-Planck-Strasse 22
6072 Dreieich 1
Germany
Telex: 529821

THE NETHERLANDS
MARANTZ
De Limiet 3
4131 NR Vianen
The Netherlands
Telex: 47679

NORWAY
MARANTZ
DIVISION OF PHILIPS A/S
Sandstuveien 40
Oslo 6
Norway
Telex: 72640

GREAT BRITAIN
MARANTZ AUDIO U.K. Ltd
Unit 15/16
Saxon Way Industrial Estate
Moor Lane
Harmondsworth UB7 OLW
Great Britain
Telex: 935196

GREECE
ADAMCO S.A.
P.O.Box 21025
Hippocrates Street 188
Athens 11410
Greece
Telex: 216.795

ITALY
MARANTZ ITALIANA S.p.A.
Via Monte Napoleone 10
20121 Milano
Italia

JAPAN
MARANTZ JAPAN, Inc.
35-1, 7-chome, Sagamiono
Sagamihara-shi, Kanagawa
Japan

KUWAIT
AL ALAMIAH ELECTRONICS
Ussama Building
Fahd al Saleem Street
P.O.Box 23781
Safat-Kuwait
Telex: 22694

SAUDI ARABIA
AL ALAMIAH ELECTRONICS
P.O.Box 5954
University Street
Riyadh 11432
Saudi Arabia
Telex: 201530

SOUTH AFRICA
MARANTZ
DIVISION OF PHILIPS S.A.
Rainer House
Ove Street, 10
Doomfontein
Johannesburg
Telex: 483.456

SPAIN
PHONO S.A.
Ignacio Iglesias 10
Badaiona (Barcelona)
Spain
Telex: 59355

SWEDEN
MARANTZ
DIVISION OF PHILIPS
Försäljning AB
Tegeluddsvägen 1
S-115 84 Stockholm
Sweden
Telex: 14060

SWITZERLAND
DYNAVOX ELECTRONICS
Route de Villars 105
1701 Fribourg
Switzerland
Telex: 942377

TURKEY
DOGRUOL Ltd.
I.M.C.
6 Blok N°6310
Unkapani
Istanbul
Turkey
Telex: 22085

MALTA
CACHIA & GALEA
Republic Street, 68D
Valetta
Telex: 1682

U.S.A.
MARANTZ COMPANY, Inc.
National Service Department
P.O.Box 577
Chatsworth, CA 91311
U.S.A.

TECHNICAL ASSISTANCE

Should you require any other technical support, do not hesitate to contact the Technical Department of MARANTZ EUROPE & Co.
Avenue Louise 326 - Bte. 32
B-1050 Brussels
Belgium
Telephone: (02) 6407830 (10 l)
Telex: 26602
Fax.: (02) 649.29.20

In case of difficulties, do not hesitate to contact the Technical Department at abovementioned address.

marantz®

TABLE OF CONTENTS

SECTION	PAGE
INTRODUCTION	1
1. SHOCK, FIRE HAZARD SERVICE TEST	1
2. P.W. BOARDS	1
3. TEST EQUIPMENT REQUIRED FOR SERVICING	2
4. VOLTAGE CONVERSION	2
5. CIRCUIT DESCRIPTION	3
6. BLOCK DIAGRAM	9
7. DIAGRAM AND COMPONENT LOCATIONS	10
7.1 Graphic Equalizer Assembly (PF00) Schematic Diagram and Component Locations	10
7.2 Visual Selector Assembly (PL00) Schematic Diagram and Component Locations	10
7.3 Input Selector Assembly (PS00) Schematic Diagram and Component Locations	11
7.4 VD Input Assembly (PV00) Schematic Diagram and Component Locations	11
7.5 VCR EASY Remote Input Assembly (PW00) Schematic Diagram and Component Locations	11
7.6 Front Switch Assembly (PU00) Schematic Diagram and Component Locations	13
7.7 Main Amp. Assembly (P700) Schematic Diagram and Component Locations	14
7.8 Volume Indicator Assembly (PU50) Schematic Diagram and Component Locations	14
7.9 Speaker Switch Assembly (PT00) Schematic Diagram and Component Locations	15
8. EXPLODED VIEW AND PARTS LIST	16
9. ELECTRICAL PARTS LIST	20
10. TECHNICAL SPECIFICATIONS	24
11. SCHEMATIC DIAGRAM	26

How to use this service manual


- The "Common parts" which Marantz Japan, Inc. has established are eliminated from this service manual.
- These "Common parts" are applied to all models in the service manuals arranged and issued by MJI.
- To indicate clearly the common parts in the schematic diagram, a line is drawn above or under the Ref. Desig. No. of applicable parts.
- "Common parts" can be supplied from the Marantz service center as ever.
In case of ordering, please establish the parts number of 10 figures following the procedure mentioned in this service manual "How to establish the parts number for common parts".

(NOTE)

When you order parts to the Marantz parts center, please take notice of the following points.

- 1) Please correctly write the parts number of 10 figures following the rule.
- 2) Since ordering parts by the Ref. Desig. No. or ratings indicated in the schematic diagram does not satisfy the above conditions, the Marantz parts supply system does not work properly.
As this case is apt to cause a trouble, please pay attention to it.

MODEL PM451/PM551 STEREO AMPLIFIER

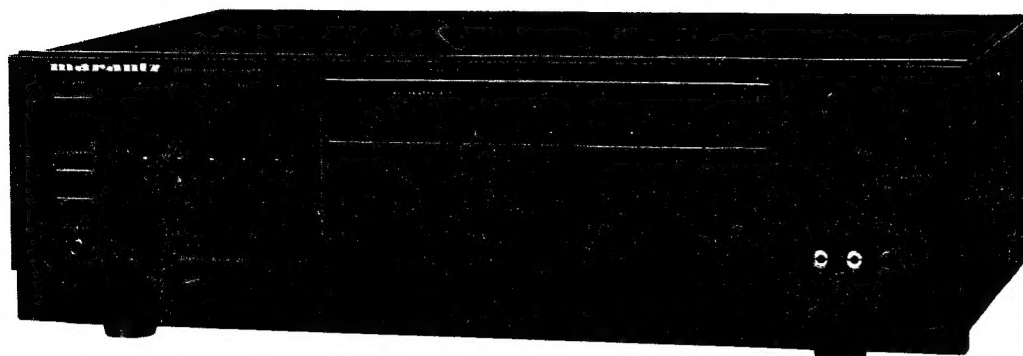

Model PM551

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for the Marantz Model PM451/PM551 Stereo Amplifier.

Servicing information and voltage data included in this manual are intended for use by knowledgeable and experienced personnel only. All instructions should be read carefully. No attempt should be made to proceed without a good understanding of circuitry operation.

The parts list furnishes complete ordering information. Most replacement parts should be ordered from the Marantz Company. However, a simple description is included for parts which can be obtained locally.

1. SHOCK, FIRE HAZARD SERVICE TEST

CAUTION: After servicing this appliance and prior to returning to customer, measure the resistance between either primary AC cord connector pins (with unit NOT connected to AC mains and its Power switch ON), and the face or front Panel of product and controls and chassis bottom.

Any resistance measurement less than 1 Megohms should cause unit to be repaired or corrected before AC power is applied, and verified before return to user/customer.

Ref. UL Standard No. 1270. Para. 66. 3. D (Mandatory Test after servicing Electrical Appliances, effective 7-1-83).

2. P.W. BOARDS

As can be seen from the circuit diagram the chassis of Model PM451/PM551 consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. Main Amp mounted on P.W. Board P700
2. Graphic Equalizer mounted on P.W. Board PF00
3. Visual Selector mounted on P.W. Board PL00
4. Input Selector mounted on P.W. Board PS00
5. Speaker Switch mounted on P.W. Board PT00
6. Front Switch mounted on P.W. Board PU00
7. Volume Indicator mounted on P.W. Board PU50
8. VD Input mounted on P.W. Board PV00
9. VCR EASY
Remote Input mounted on P.W. Board PW00

3. TEST EQUIPMENT REQUIRED FOR SERVICING

This table lists the test equipment required for servicing the Model PM451/PM551 Stereo Amplifier.

Item	Use
Distortion Analyzer	Distortion measurements
Audio Oscillator	Sinewave and squarewave signal source
AC VTVM	Voltage measurements (AC)
Oscilloscope	Waveform analysis and trouble shooting and ASO alignment
Circuit Tester	Trouble shooting
DC VTVM	Voltage measurements (DC)
AC Wattmeter	Monitors primary power to amplifier
Line Voltmeter	Monitors potential of primary power to amplifier
Variable Autotransformer (0 ~ 140V AC, 10A)	Adjust level of primery power to amplifier
Shorting Plug	Shorts amplifier input to eliminate noise pickup




4. VOLTAGE CONVERSION

To convert the unit to a different power source voltage, change the position as illustrated in the drawing below.

CAUTION: DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE. DO NOT DISASSEMBLE THE VOLTAGE SELECTOR ABSOLUTELY.

Note on safety:

Symbol \triangle Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol \triangle . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

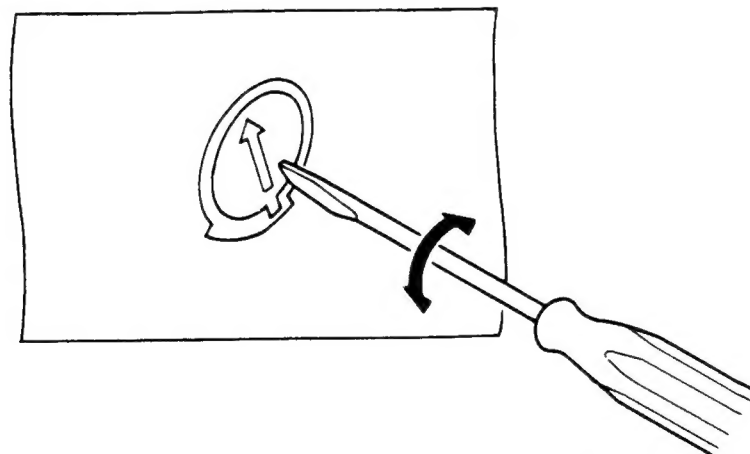


Me949

5. CIRCUIT DESCRIPTION

SINGLE-CHIP 4-BIT MICROCOMPUTER LC6502C (QU01)


BLOCK DIAGRAM

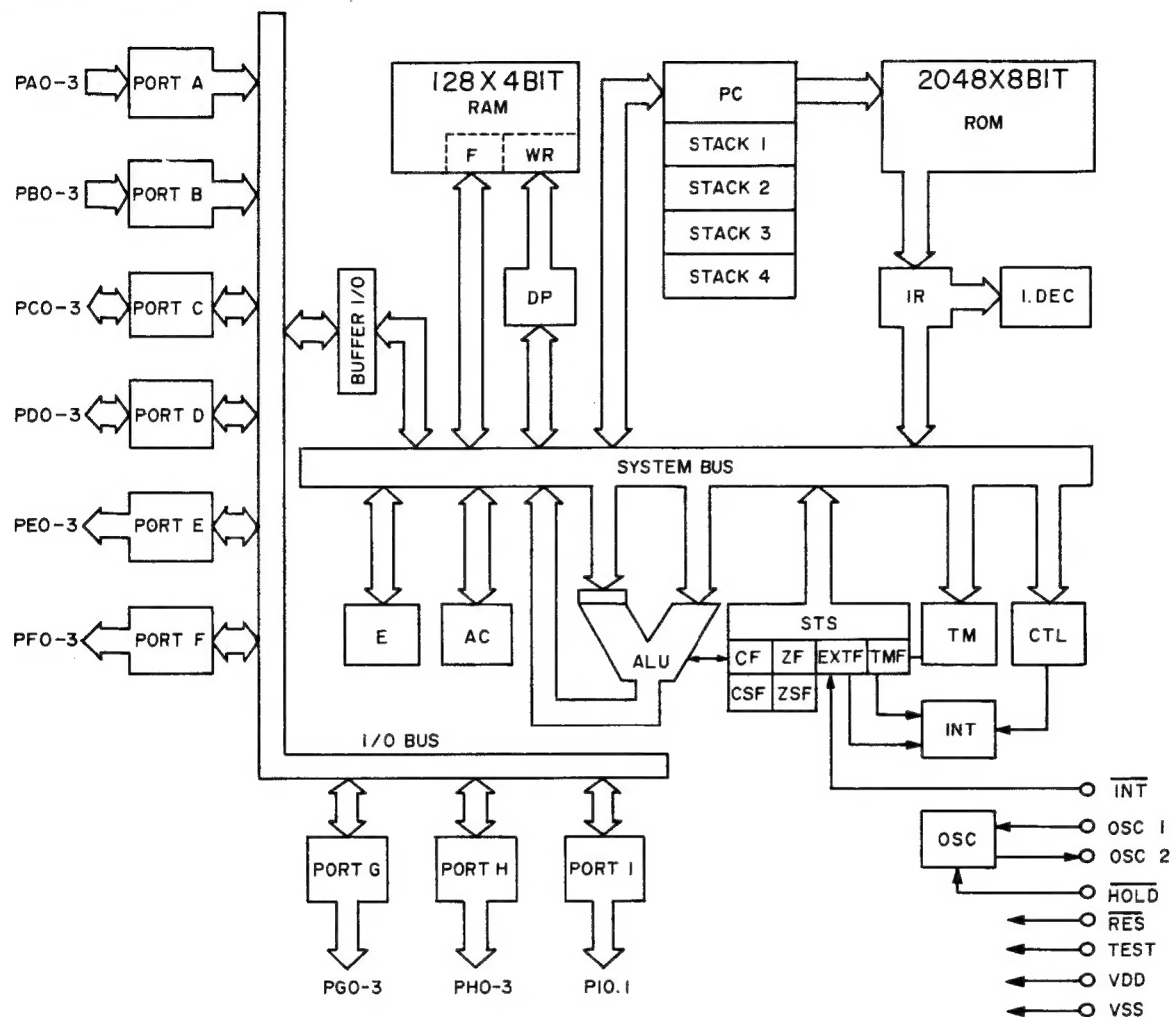

RAM:	data memory
F:	flag
WR:	working register
AC:	accumulator
ALU:	logical operator unit
DP:	data pointer
E:	E register
CTL:	control register
OSC:	oscillator circuit
TM:	timer
STS:	status register

ROM:	program memory
PC:	program counter
INT:	interrupt control
IR:	instruction register
I. DEC:	instruction decoder
CF, CSF:	carry flag, carry save flag
ZF, ZSF:	zero flag, zero save flag
EXTF:	external interrupt request flag
TMF:	internal interrupt request flag

Terminal Connections

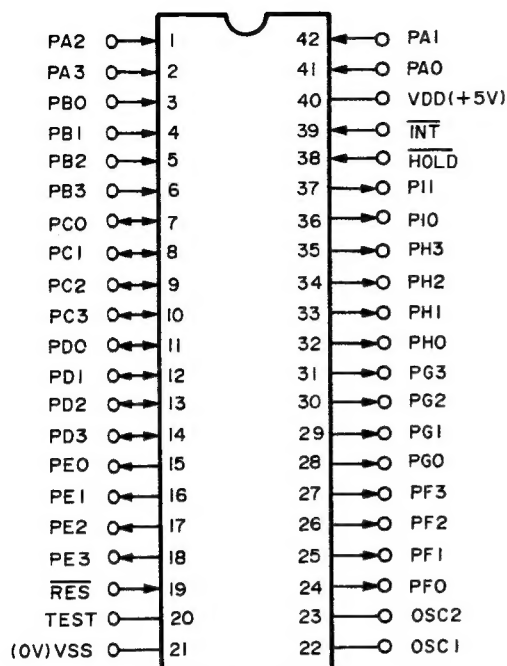

Terminal Function


Terminal Name	I/O	Function
INT	Input	Pseudo interrupt request input terminal.
HOLD	Input	Hold mode request input terminal.
RES	Input	Reset input terminal.
PA3-0	Input	Input ports A3 to A0 In input mode, 4-bit input and bit test are allowed. Used for HALT mode release and request input.
PB3-0	Input	Input ports B3 to B0 In input mode, 4-bit input and bit test are allowed.
PC3-0	I/O	I/O ports C3 to C0 In input mode, 4-bit input and bit test are allowed. In output mode, 4-bit output, bit set/reset output are allowed.
PD3-0	I/O	I/O ports D3 to D0 In input mode, 4-bit input and bit test are allowed. In output mode, 4-bit output, bit set/reset output are allowed.
PE3-0	Output	Output ports E3 to E0 4-bit output and bit set/reset are allowed. Input of output latch contents in 4-bit units and testing of output latch of bit is possible.
PF3-0	Output	Output ports F3 to F0 4-bit output and bit set/reset are allowed. Input of output latch contents in 4-bit units and testing of output latch of bit is possible.
PG3-0	Output	Output port G3 to G0 4-bit output and bit set/reset are allowed. Input of output latch contents in 4-bit units and testing of output latch of bit is possible.
PH3-0	Output	Output ports H3 to H0 4-bit output and bit set/reset are allowed. Input of output latch contents in 4-bit units and testing of output latch of bit is possible.
PI0, 1	Output	Output ports I0, 1 2-bit output and bit set/reset are allowed. Input of output latch contents in 4-bit units and testing of output latch of bit is possible.
OSC1	Input	Terminal operated with clock signal externally supplied. A ceramic resonator and CR are connected to the space between the X'tal and this terminals when using the local clock signal oscillator.
OSC2	I/O	External terminal of the resonance circuit for local clock signal oscillation.
VDD	Input	Power terminal, usually connected to +5V.
VSS		Connected to 0V of power supply.
TEST	Input	LSI test terminal, usually connected to VSS (0V).

Maximum Ratings (Ta = 25°C, VSS = 0V)

Item	Symbol	Condition	Min.	Max.	Unit
Maximum supply voltage	VDD max.		-0.3	+7	V
Input voltage	VIN		-0.3	VDD+0.3	V
Output voltage	VOU	Output transistor OFF	-0.3	VDD+0.3	V
Allowable power dissipation	Pd max.	-30°C to +70°C		350	mW
Ambient operating temperature	Topg		-30	+70	°C
Ambient storage temperature	Tstg		-55	+125	°C

ELECTRON VOLUME IC TC9177P (QS03)

BLOCK DIAGRAM

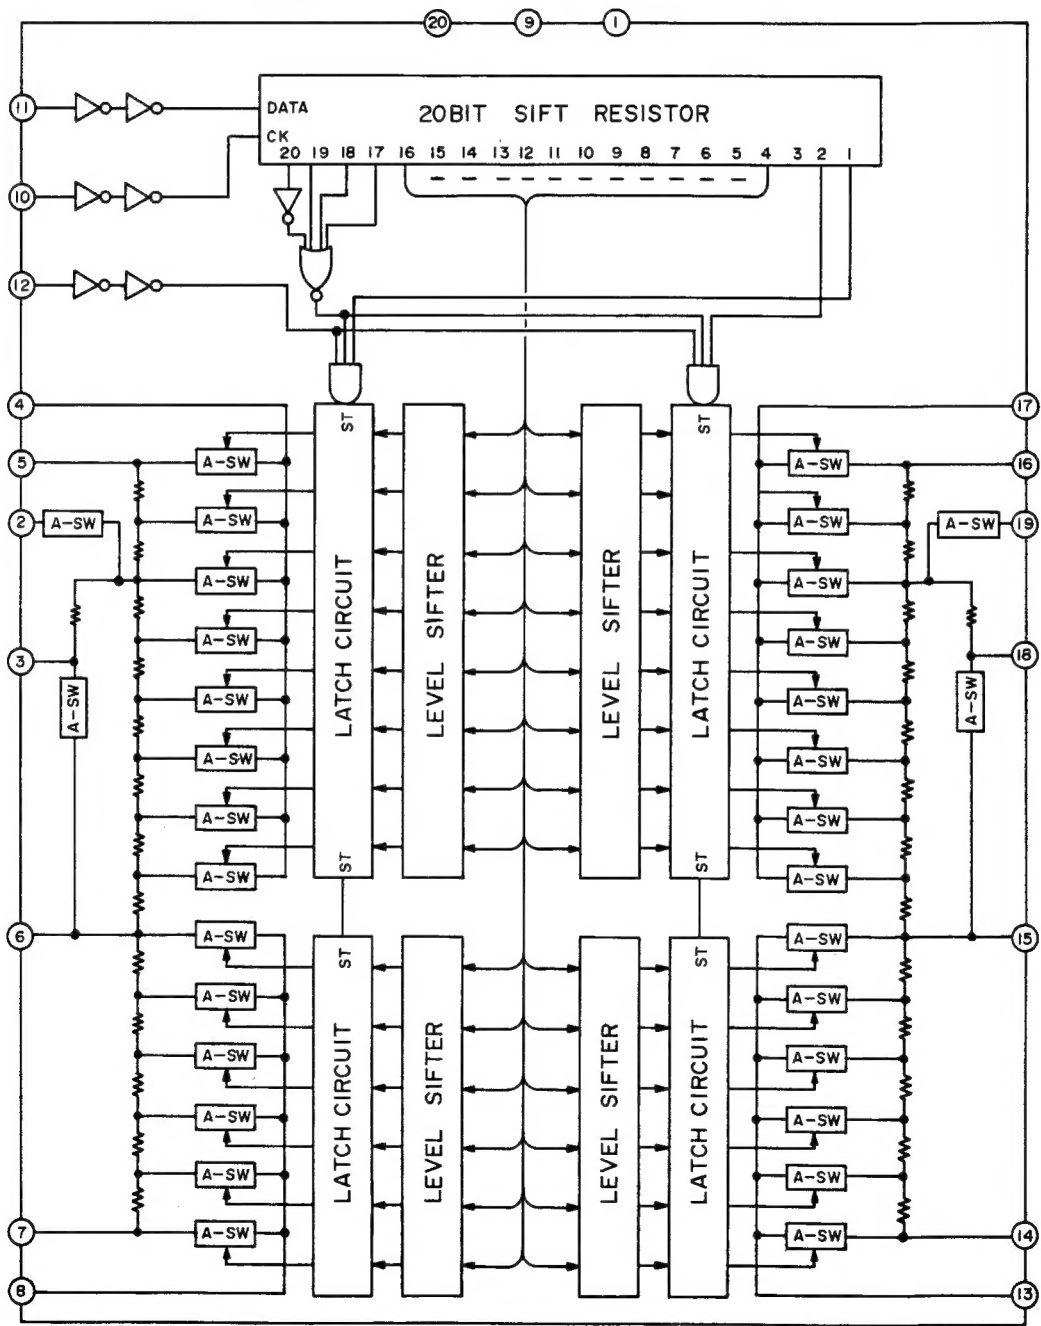

Terminal Connections

VSS	1	20	VDD
L-LOUDNESS 1	2	19	R-LOUDNESS 1
L-LOUDNESS 2	3	18	R-LOUDNESS 2
L-OUT 1	4	17	R-OUT 1
L-IN 1	5	16	R-IN 1
A-GND	6	15	A-GND
L-IN 2	7	14	R-IN 2
L-OUT 2	8	13	R-OUT 2
GND	9	12	ST
CK	10	11	DATA

Terminal Function

Pin No.	Name	Function Description
2, 3 18, 19	L-LOUDNESS 1, 2 R-LOUDNESS 1, 2	Pins for loudness When loudness data is input, these pins becomes -20 dB dampened pins. Loudness control is possible through the connection of high and low range boosting circuits to these pins.
4, 17	L-OUT ₁ R-OUT ₁	10 dB step attenuator output. The signal applied to IN is attenuated in 8 10 dB steps from 0 to 70 dB.
5, 16	L-IN ₁ R-IN ₁	10 dB attenuator input.
6, 15	A-GND	AC ground pin.
7, 14	L-IN ₂ L-IN ₂	2 dB attenuator pin.
8, 13	L-OUT ₂ R-OUT ₂	2 dB attenuator output. The signal applied to IN is attenuated in 5 2 dB steps from 0 to 8 dB.
11	DATA	Data input for amount of attenuation and channel selection. Input by CK signal, configured in 20 bits.
10	CK	Clock input. Clock input for fetching data from DATA pin.
12	ST	Strobe input. The data for the amount of attenuation and channel selection fetched from the DATA and CK pins is latched when this pin is "high". The previous data remains effective when a high level is not applied to this pin.
20	VDD	Pin for (+) voltage.
9	GND	Ground pin.
1	VSS	Pin for (-) voltage.

Maximum Ratings (Ta = 25°C)


Item	Symbol	Ratings	Unit
Supply voltage	VDD	VSS-0.3 ~ VSS+36	V
Input voltage	VIN	VSS-0.3 ~ VDD+0.3	V
Power dissipation	PD	300	mW
Operating temperature	Topr	-30 ~ 75	°C
Storage temperature	Tstg	-55 ~ 125	°C

lectrical Characteristics (V_{DD} = 15V, V_{SS} = -15V Ta = 25°C)


Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating power voltage range	V _{DD} -V _{SS}		7.5	~	32	V
Operating supply current	I _{DD}			0.5	3.0	mA
Input voltage	"H" V _{IH}	DATA, CK, ST terminal	4.0	~	V _{DD} +0.3	V
Input voltage	"L" V _{IL}		-0.3	~	1.0	V
Total resistance value (ATT ₁)	R _{ATT1}		90	120	160	KΩ
Total resistance value (ATT ₂)	R _{ATT2}		10	14	20	KΩ
Step error (ATT ₁)	STEP(1)	f _{in} =DC~20 kHz R _L =∞	0 ~ 30 dB	10	10.8	dB
			-40 ~ 70 dB		11.8	
Step error (ATT ₂)	STEP(2)	f _{in} =DC~20 kHz R _L =∞	-1.2	2	2.8	dB
Total harmonic distortion (ATT ₁)	THD(1)	f _{in} =20~20 kHz, V _{in} =1.0Vrms 0 dB		0.003	0.005	%
Total harmonic distortion (ATT ₂)	THD(2)	f _{in} =20~20 kHz, V _{in} =1.0Vrms 0 dB		0.003	0.005	%
Maximum amount of attenuation	ATT(max.)		90			dB
Output noise voltage	V _N	0 dB Position f _{out} =20~20 kHz R _g =1KΩ		2	10	μVrms
Channel separation	C.S	V _{in} =1 Vrms f _{in} =1 kHz	80			dB
CONTROL INPUT SECTION						
Maximum operating frequency	f(max)				500	kHz
Minimum clock width ("H")	T _{CK(H)}		1.0			μsec
Minimum clock width ("L")	T _{CK(L)}		1.0			μsec

HIGH VOLTAGE RESISTING ANALOG FUNCTION SWITCH ARRAY TC9163N (QS01)

BLOCK DIAGRAM

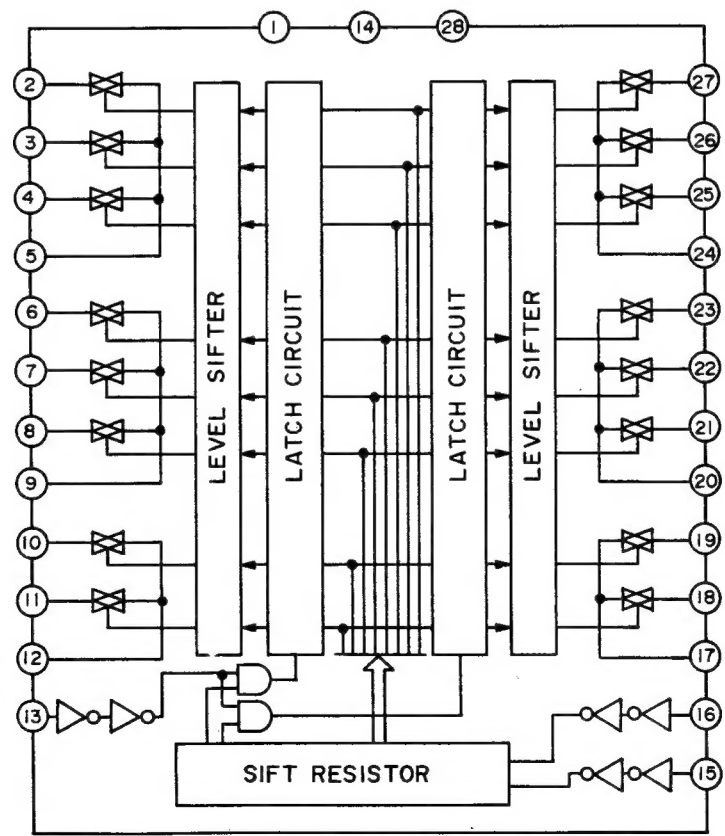

Terminal Connections

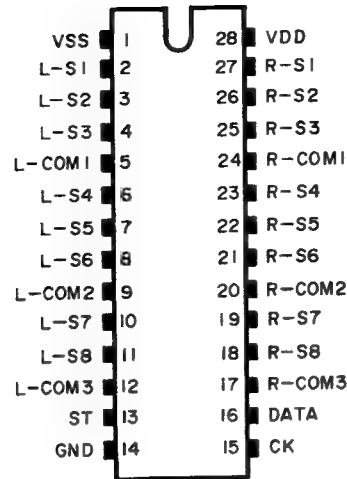

Maximum Ratings


Item	Symbol	Ratings	Unit
Supply voltage (1)	V _{DD} V _{SS}	34	V
Supply voltage (2)	V _{DD} GND	17	V
Input voltage	V _{IN}	V _{SS} -0.3 ~ V _{DD} +0.3	V
Power dissipation	P _D	300	mW
Operating temperature	T _{opr}	-30 ~ 75	°C
Storage temperature	T _{stg}	-55 ~ 125	°C

Electrical Characteristics (V_{DD}=16V, V_{SS}=-16V, GND=0V, Ta=25°C)


Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating supply voltage (1)	V _{DD} -GND		8	~	16	V
Operating supply voltage (2)	GND-V _{SS}		-8	~	-16	V
Operation supply current	I _{DD}	V _{DD} =16V, V _{SS} =-16V, GND=0V	-	~	3	mA
Backup voltage	V _B		4	~	16	V
Backup current	I _B	V _{DD} =4.0V, V _{SS} =GND=0V	-	1	10	μA
High level input voltage	V _{IH}	V _{DD} =16V, CK, DATA, ST	4	-	16	V
Low level voltage	V _{IL}	V _{DD} =16V, CK, DATA, ST	0	-	10	V
Operating minimum pulse width	t _{in}		5	-	-	μsec
Switch ON resist.	R _{ON}		-	100	200	Ω
Total harmonic distortion.	THD	f _{in} =0~20 kHz, V _{in} =1V _{rms}	-	0.002	0.005	%
Nois voltage.	V _{NO}	f=20~50 kHz	-	2	10	μV _{rms}




7.3 Input Selector Assembly (PS00) Schematic Diagram and Component Locations

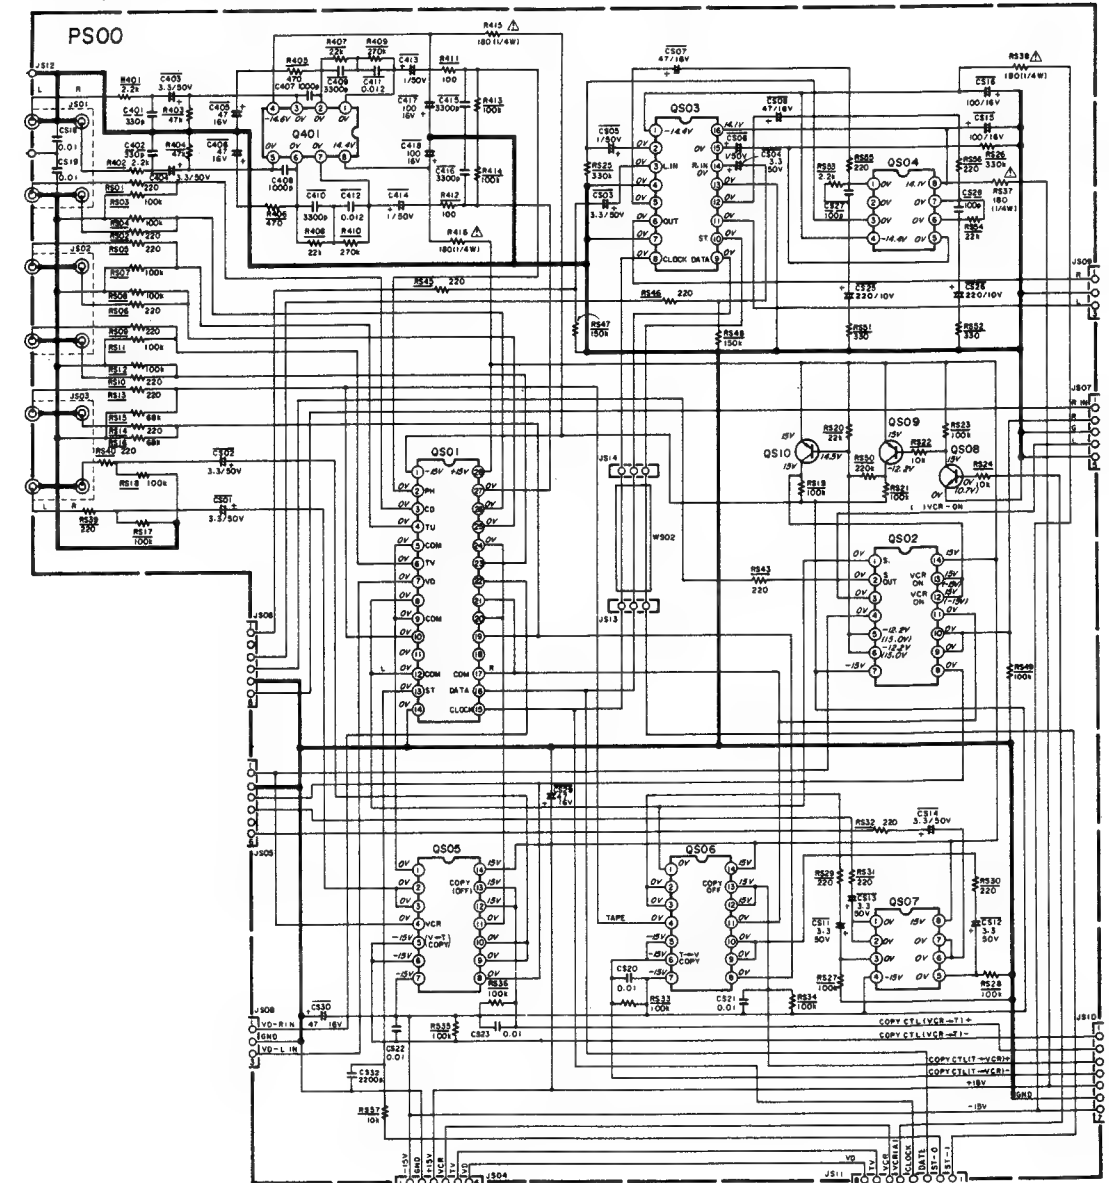

7.4 VD Input Assembly (PV00) Schematic Diagram and Component Locations

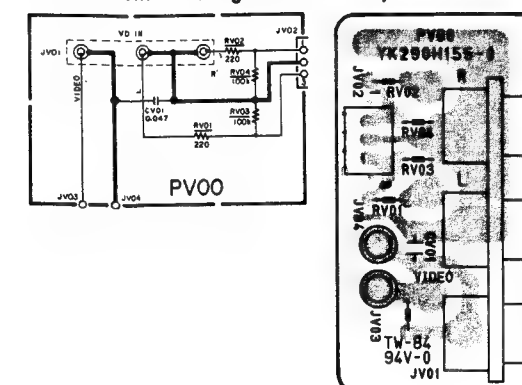


7.5 VCR EASY Remote Input Assembly (PW00) Schematic Diagram and Component Locations

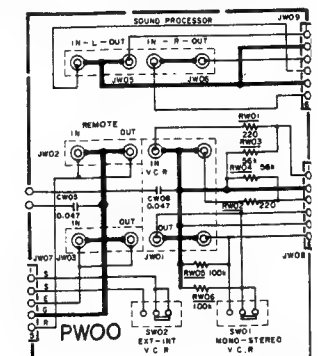





7. DIAGRAM AND COMPONENT LOCATIONS

7.1 Graphic Equalizer Assembly (PF00) Schematic Diagram and Component Locations

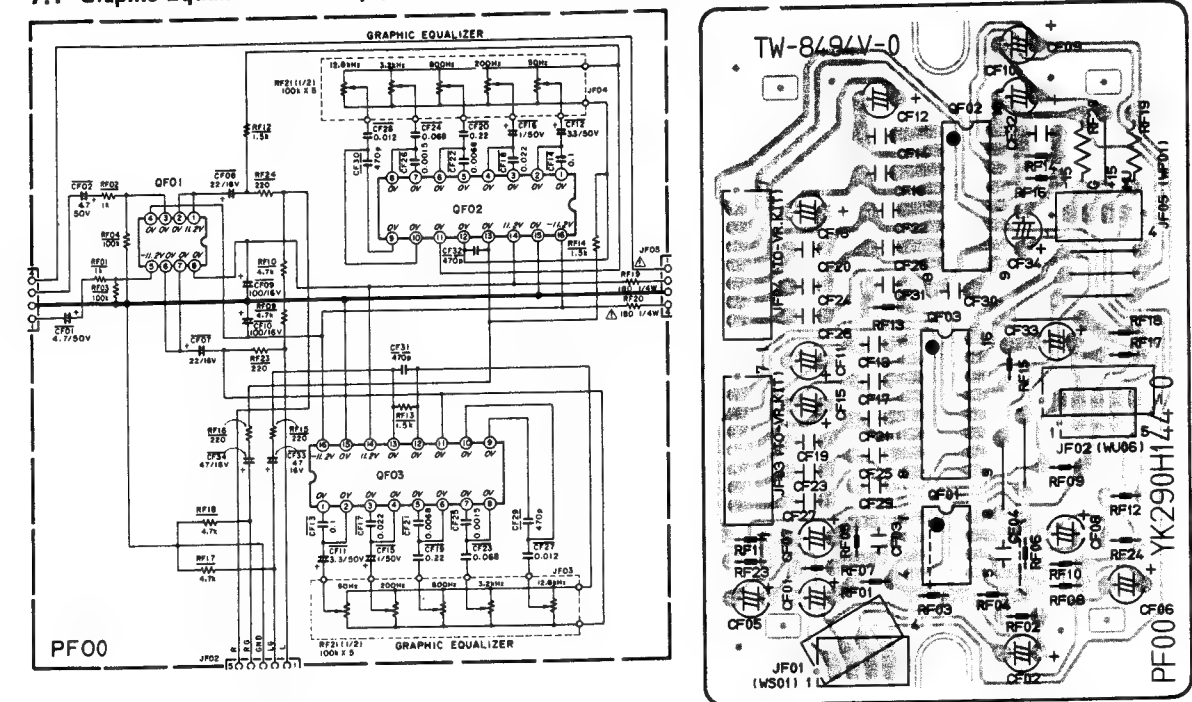


7.2 Visual Selector Assembly (PL00) Schematic Diagram and Component Locations

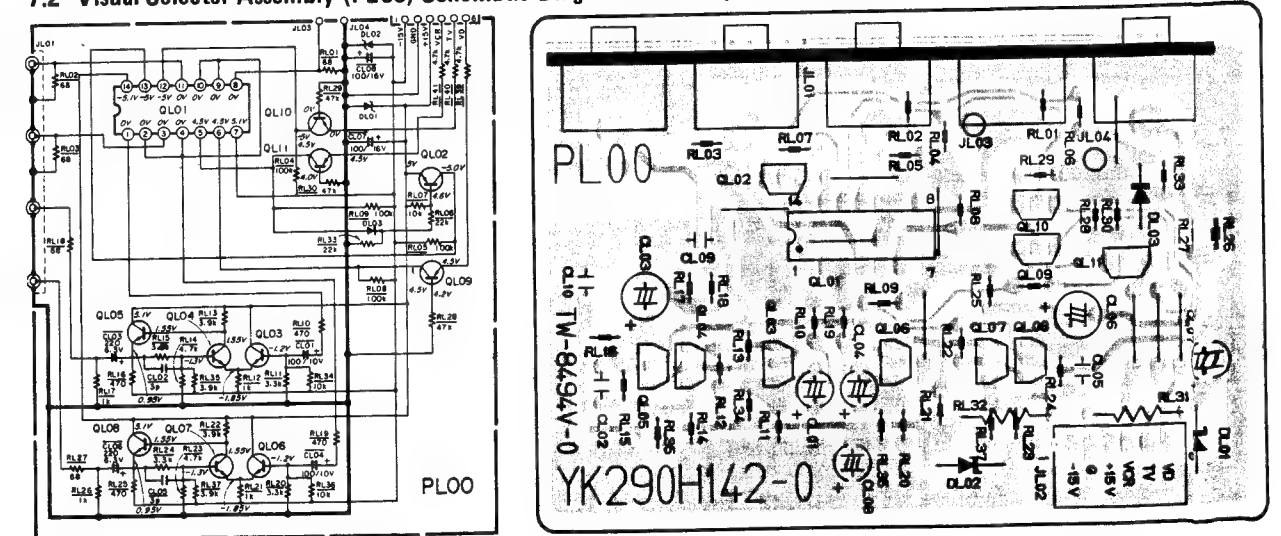


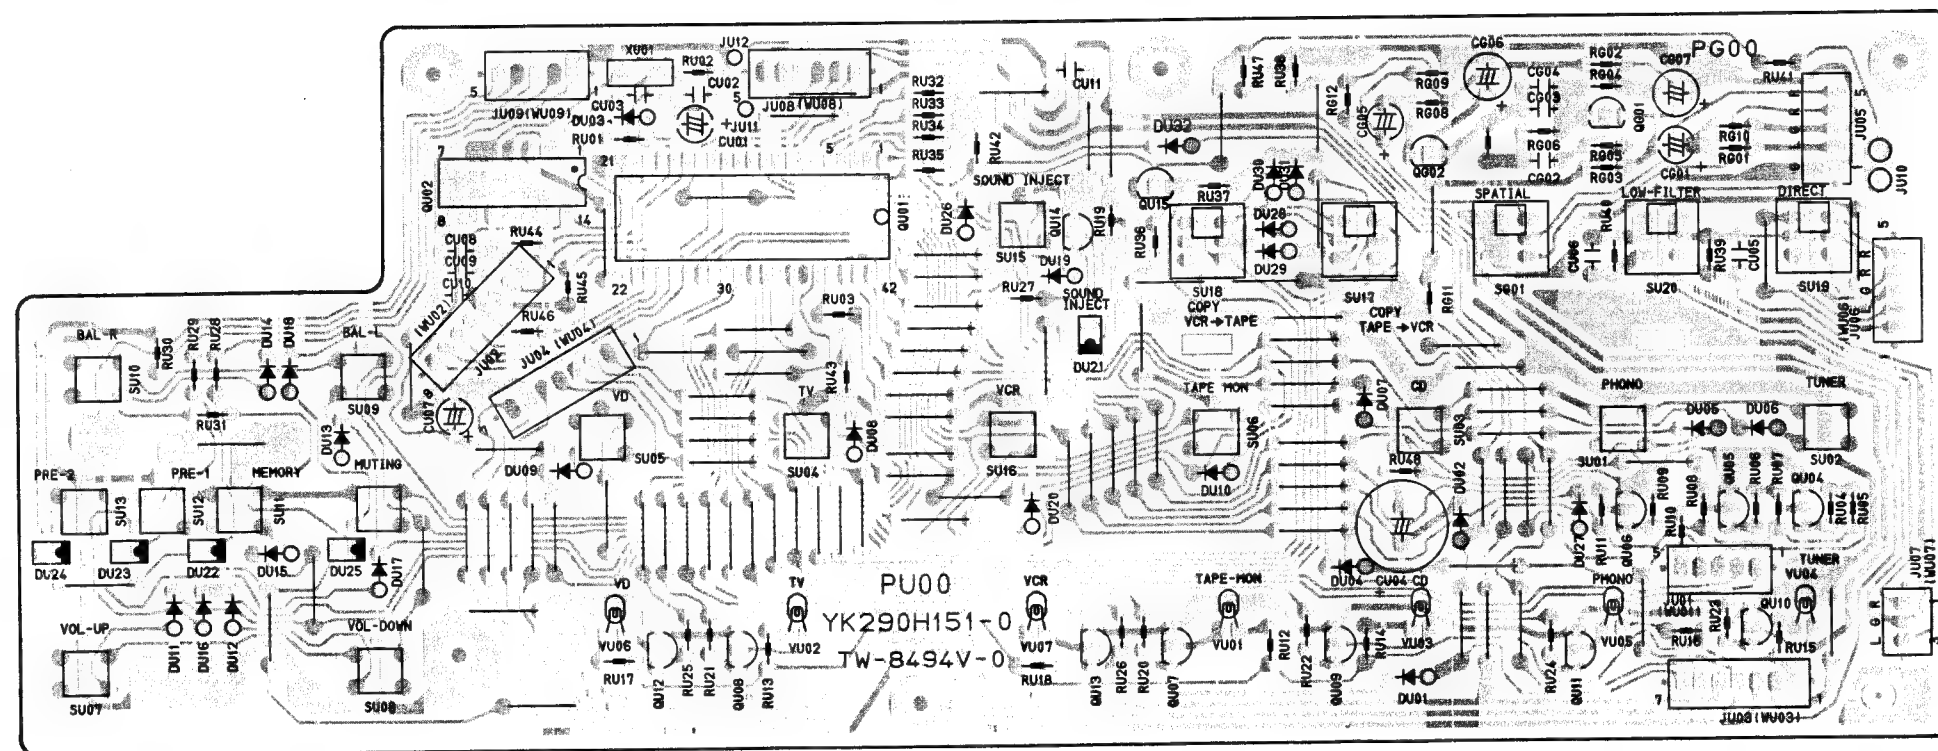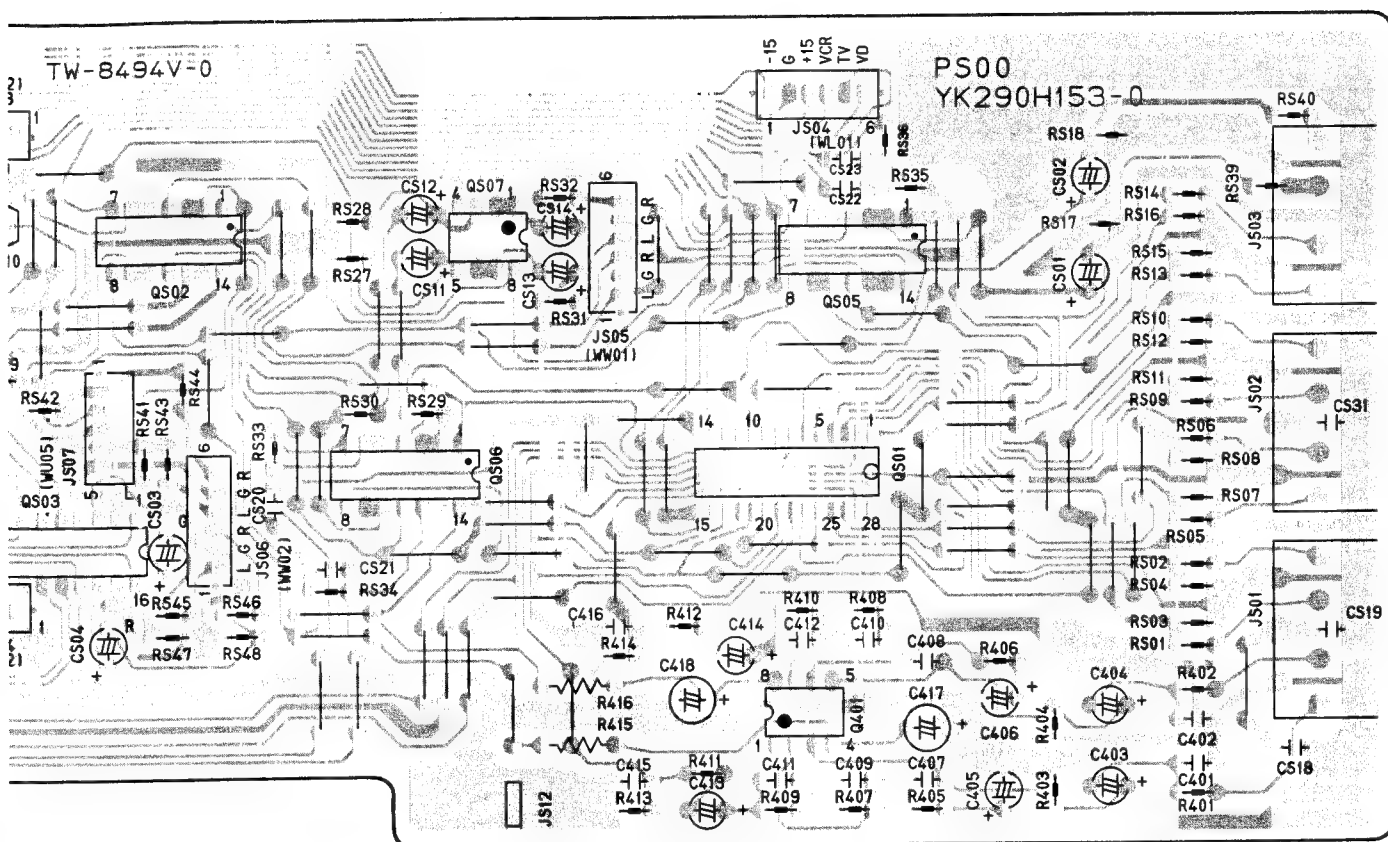



7.6 Front Switch Assembly (PU00) Schematic Diagram and Component Locations

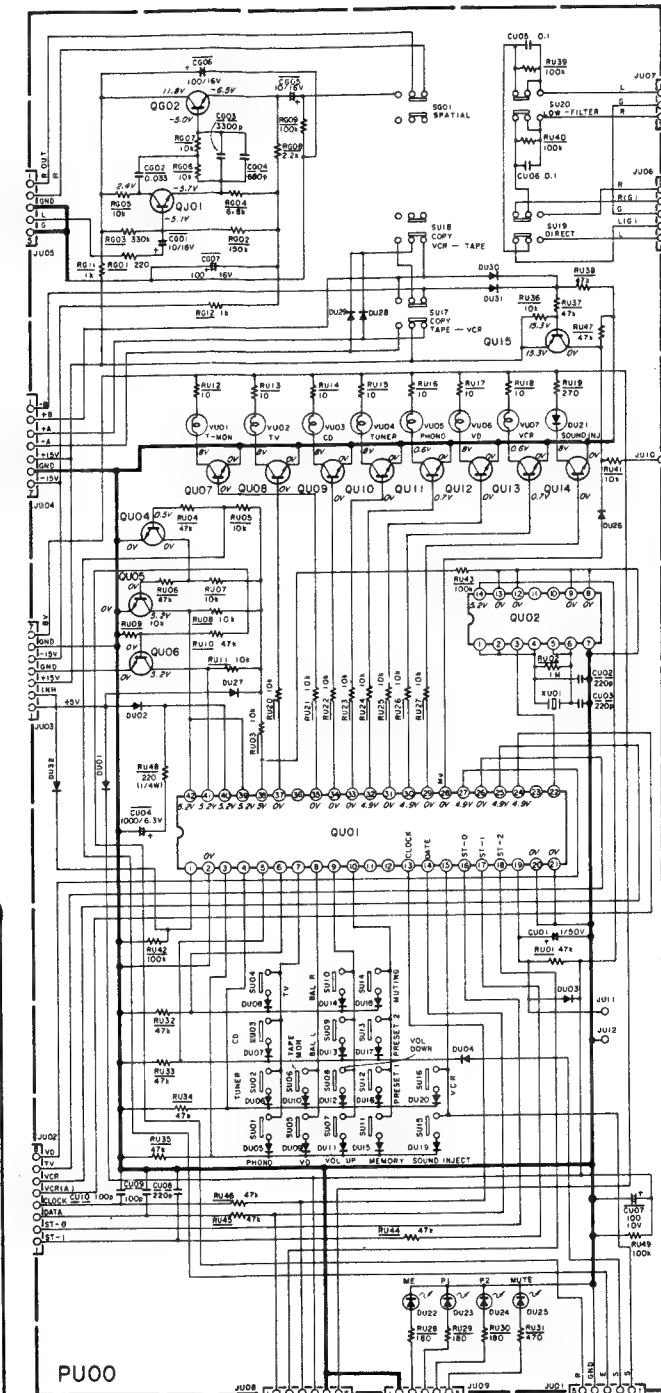


7.7 Main Amp. Assembly (P700) Schematic Diagram and Component Locations


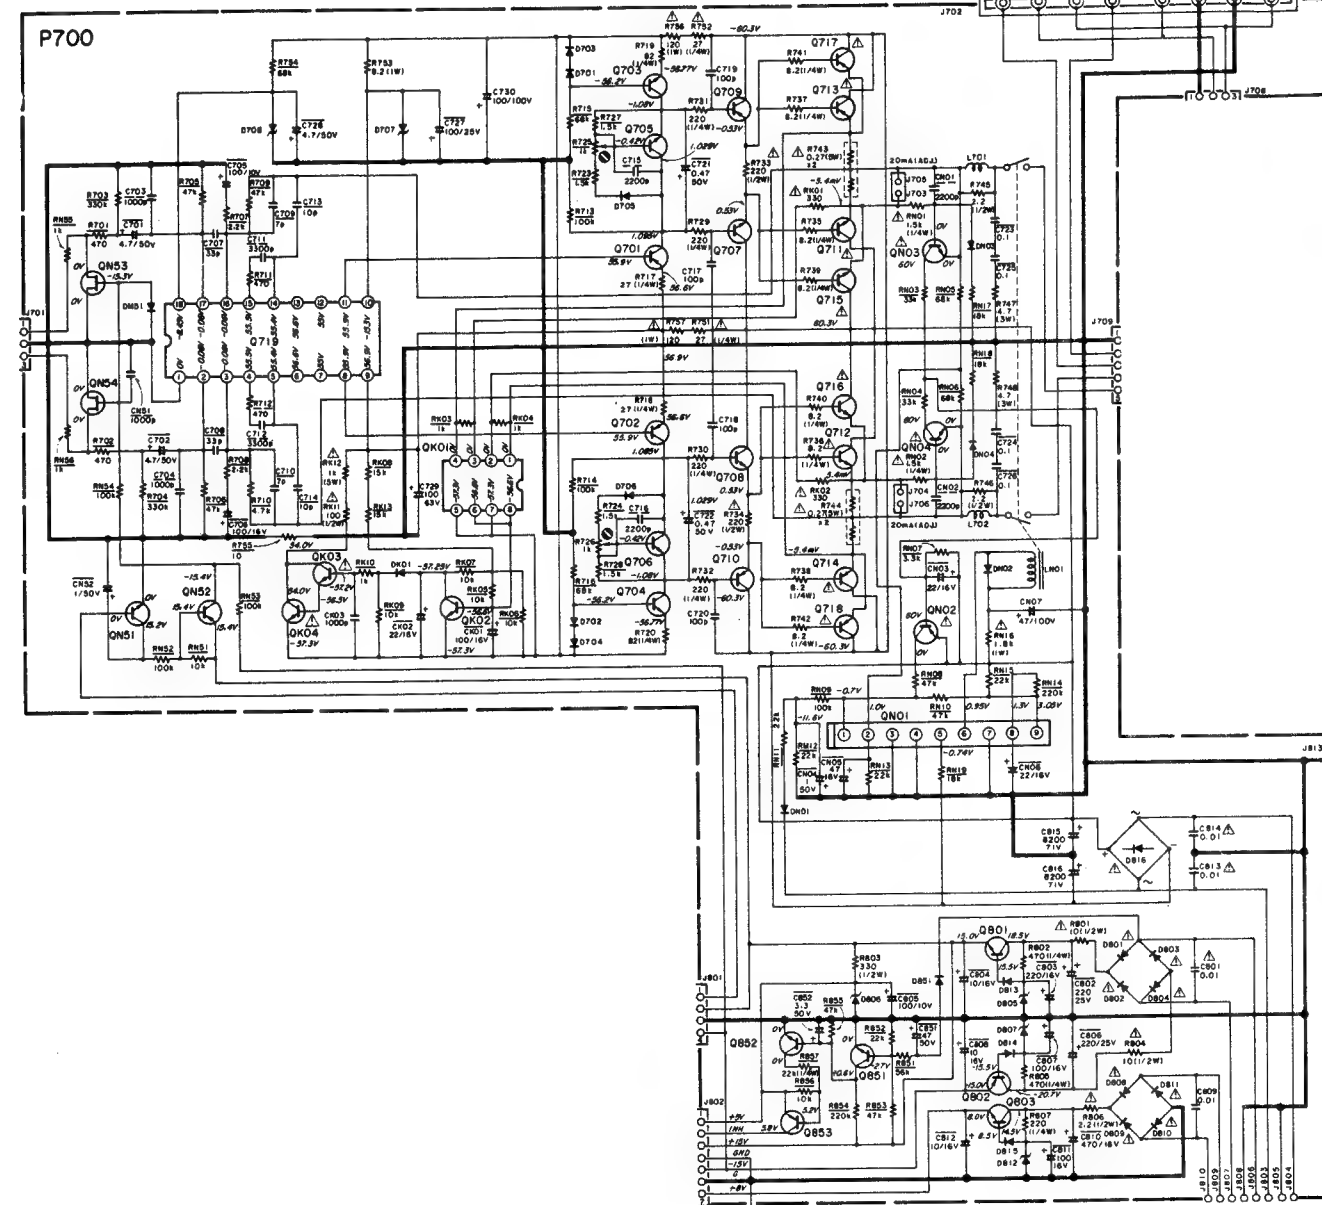


7.8 Volume Indicator Assembly (PU50) Schematic Diagram and Component Locations

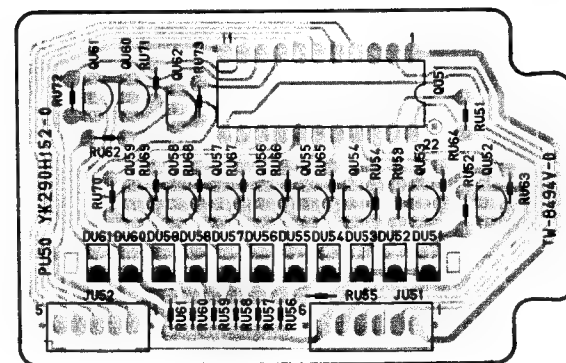
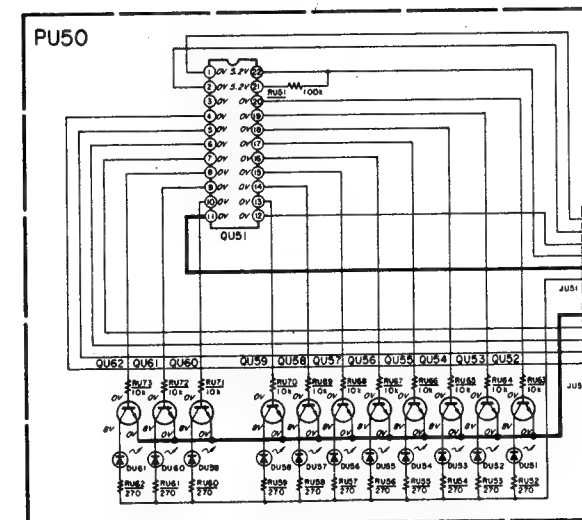


7.9 Speaker Switch Assembly (PT00) Schematic Diagram and Component Locations

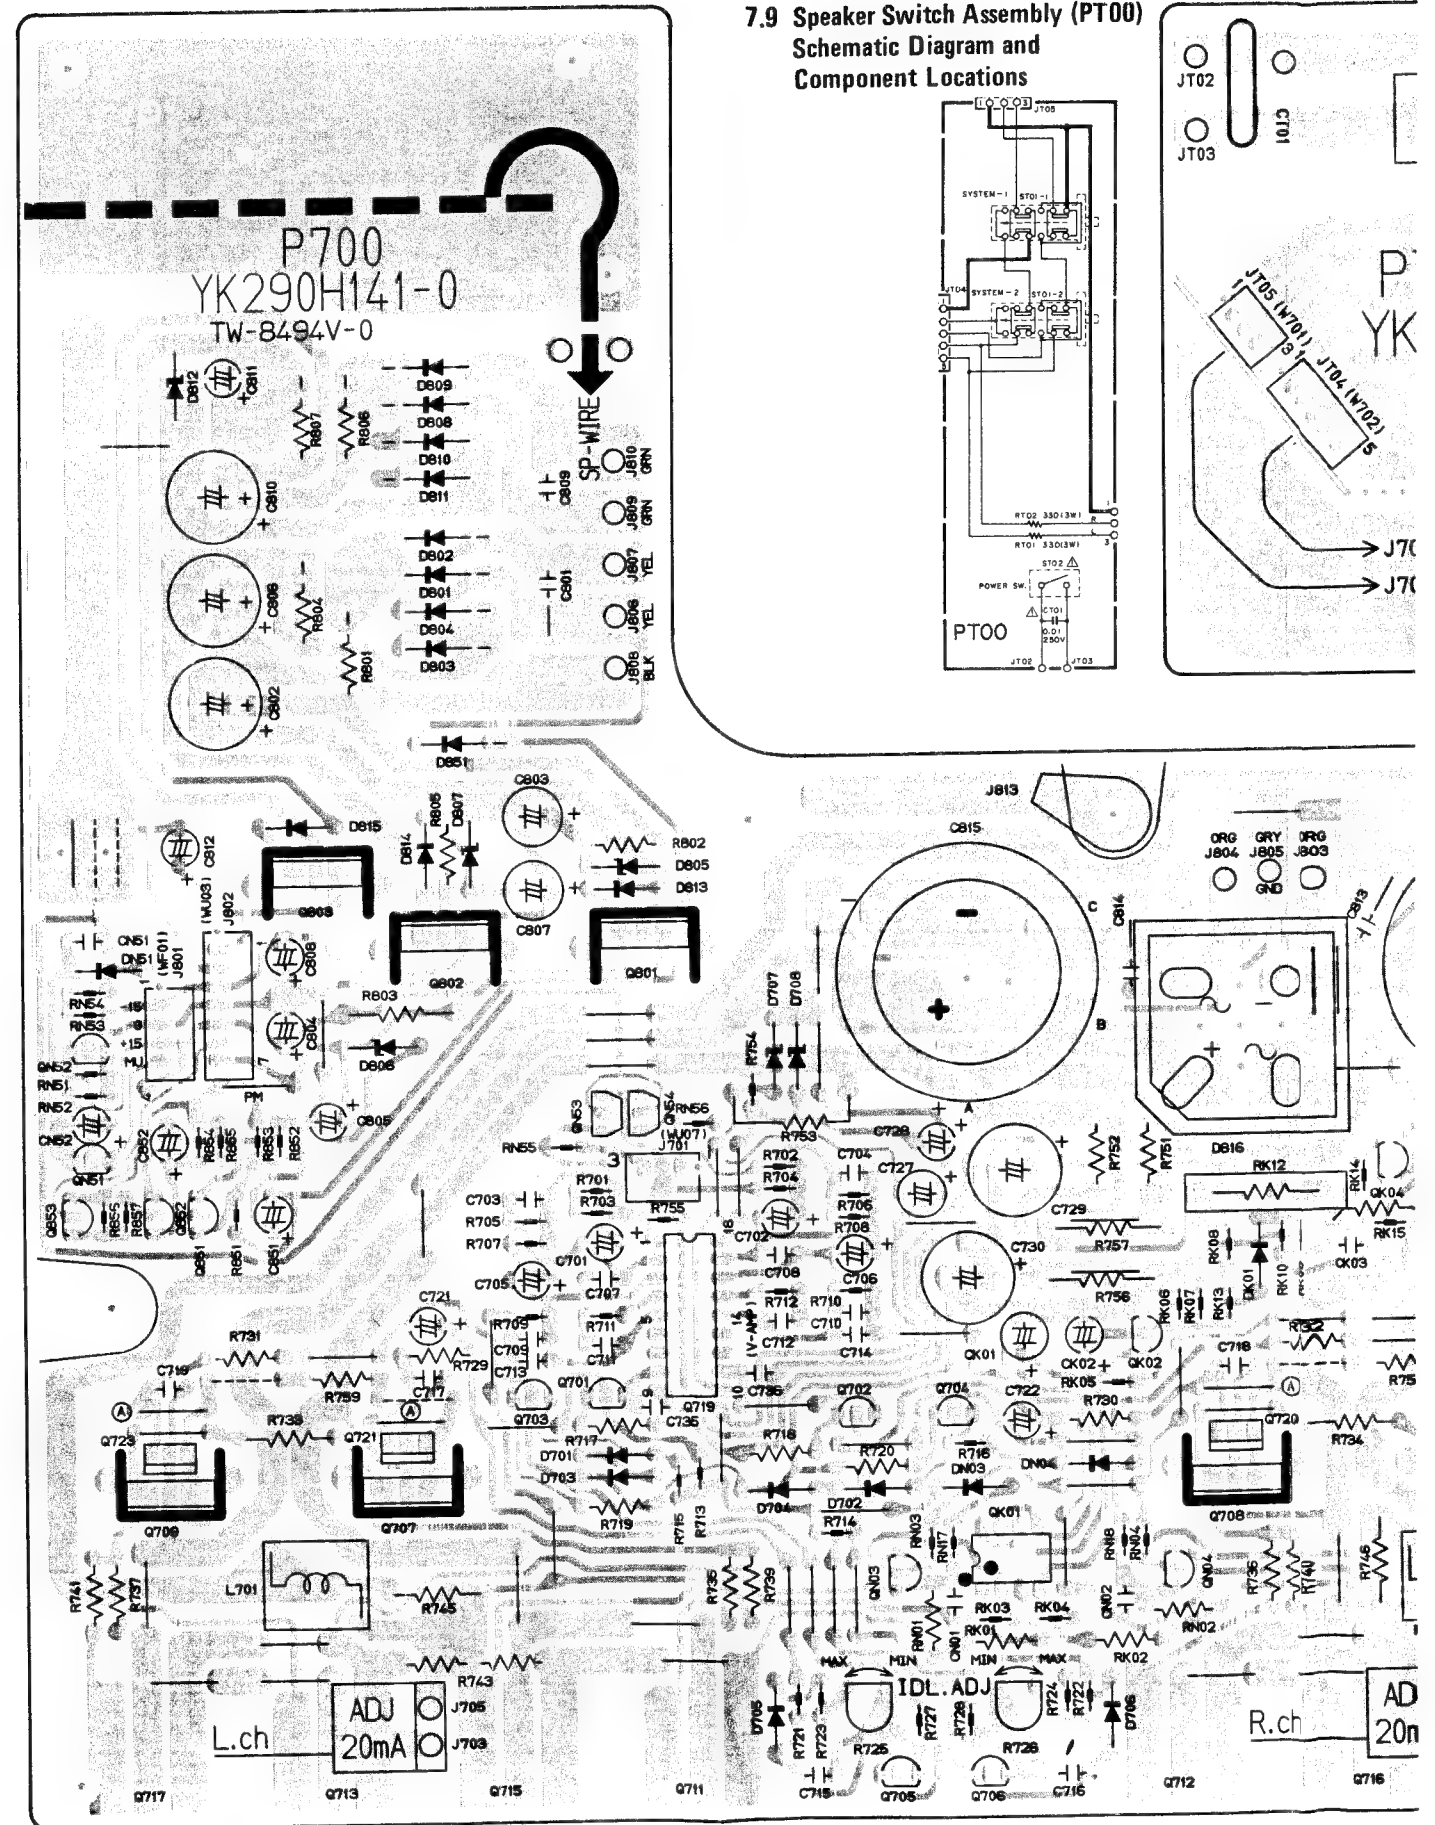

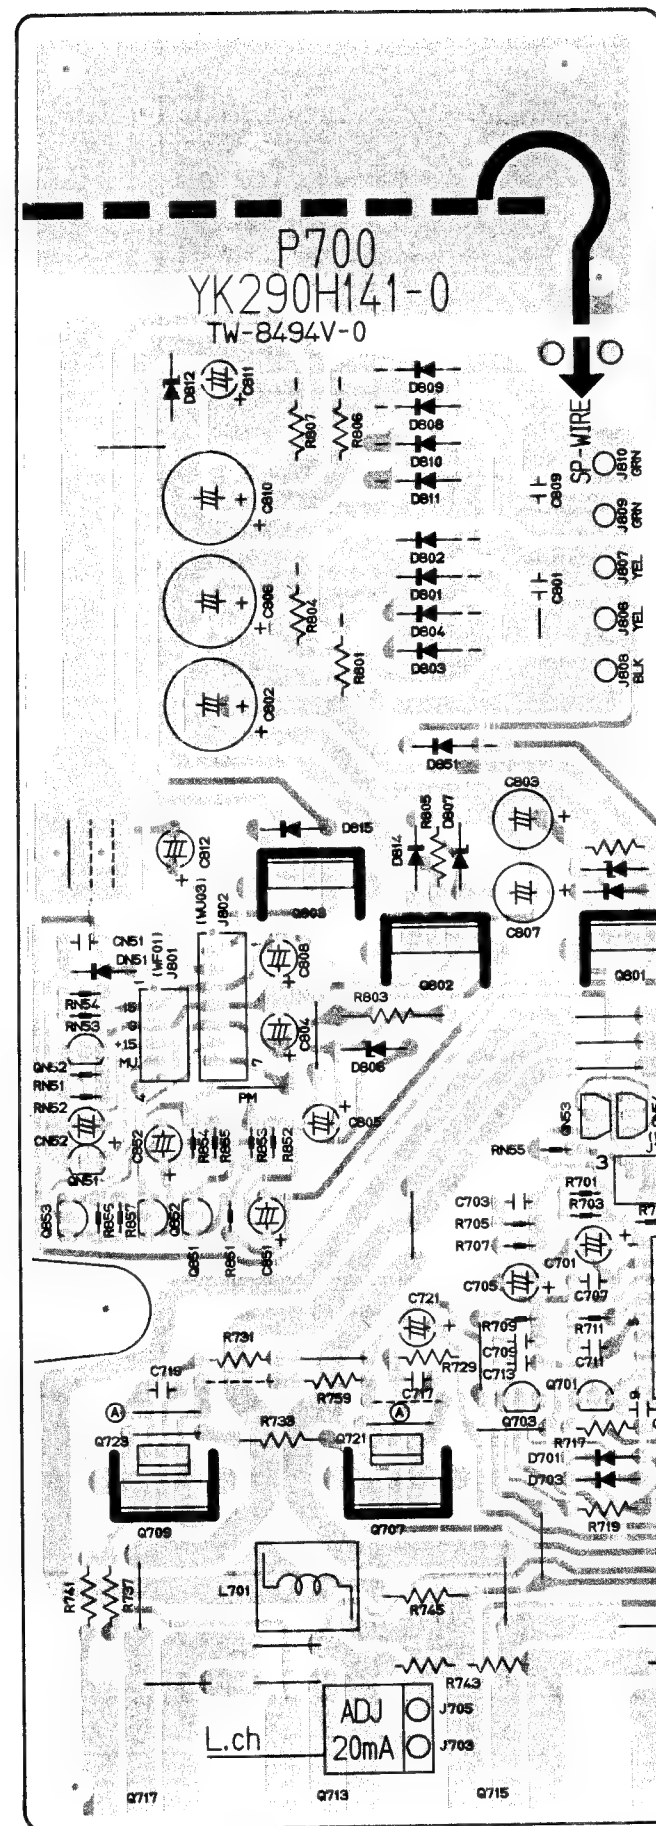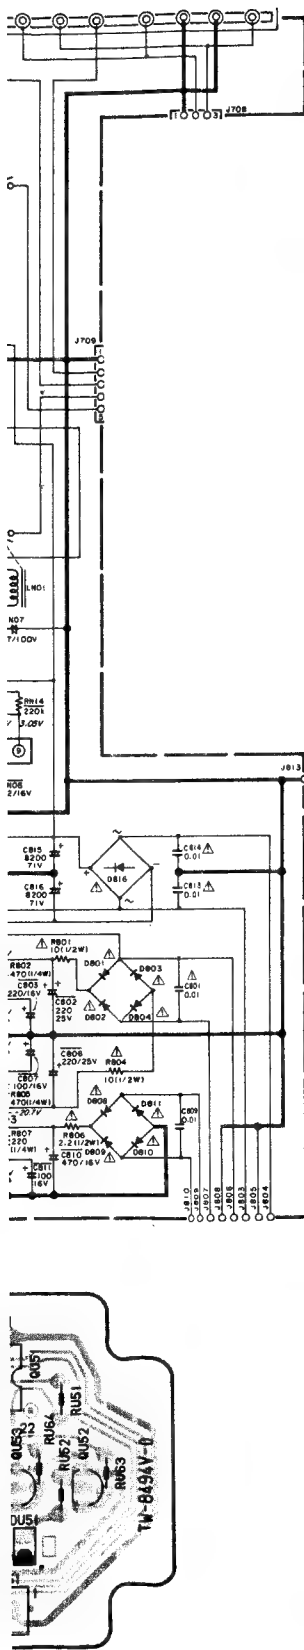


7.9 Speaker Switch Assembly (PT00)
Schematic Diagram and
Component Locations

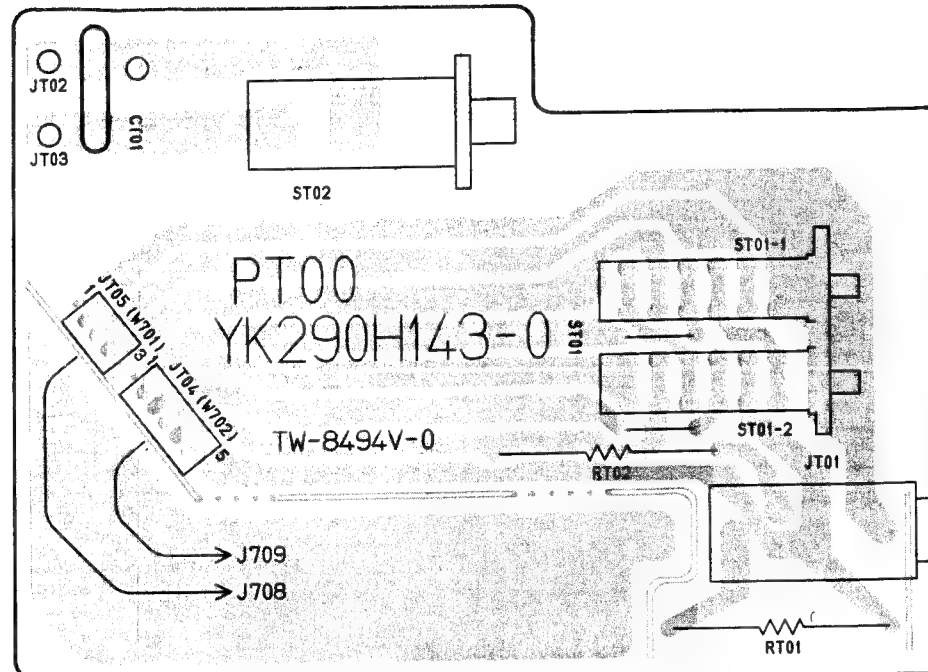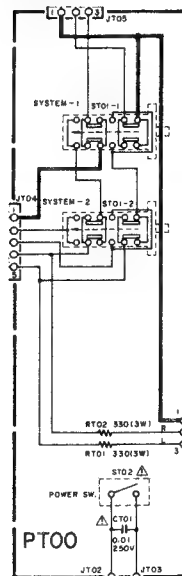

8. EXPLODED VIEW AND PARTS LIST

[C01-99] FRONT PANEL

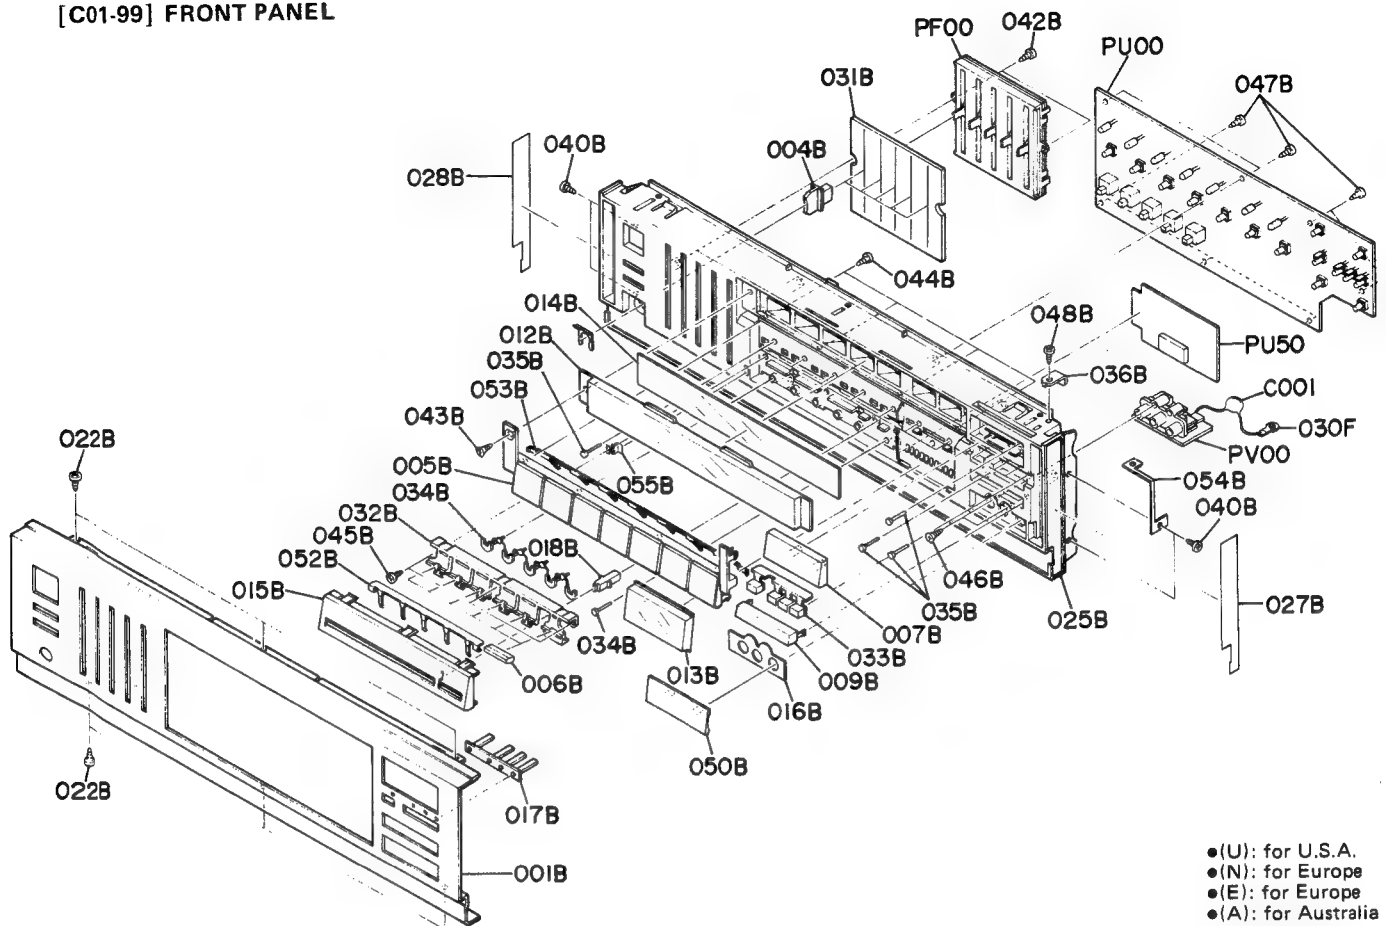


●(U): for U.S.A.
 ●(N): for Europe
 ●(E): for Europe
 ●(A): for Australia
 ●(F): for Japan

REF. DESIG.	PART NO.	DESCRIPTION
001B	290H248010	Front Panel, Gold (PM551) [U,N,E,A]
	290H248020	Front Panel, Black (PM551) [U,N,E,A,F]
	289H248010	Front Panel, Gold (PM451) [N,E,A]
	289H248020	Front Panel, Black (PM451) [N,E,A,F]
004B	289H154010	Knob, Equalizer; Gold
	289H154210	Knob, Equalizer; Black
005B	289H270030	Button, Function K; Gold
	289H270130	Button, Function K; Black
006B	289H270020	Button, Push; Gold
	289H270120	Button, Push; Black
007B	471H270340	Button, Volume; Gold
	471H270640	Button, Volume; Black
008B	289H270010	Button, Push; Gold
	289H270110	Button, Push; Black
009B	289H154020	Knob, Balance; Gold
	289H154220	Knob, Balance; Black
012B	289H158010	Window, Function
013B	289H158020	Window, Volume Level; Gold
	290H158010	Window, Volume Level; Black
014B	289H265010	Indicator, Function; Gold
	290H265010	Indicator, Function; Black
015B	289H063010	Escutcheon, Copy; Gold
	289H063110	Escutcheon, Copy; Black
016B	289H063020	Escutcheon, 3P Jack; Gold
	289H063120	Escutcheon, 3P Jack; Black
017B	289H355010	Lens, Tuning/Memo

REF. DESIG.	PART NO.	DESCRIPTION
018B	289H355020	Lens, Sound Inject
022B	51280308B0	B.H. Tapped Screw B3 x 8
025B	289H105500	Chassis, Front K; Gold
	289H105010	Chassis, Front; Black
027B	289H063030	Escutcheon, (R)
028B	289H063040	Escutcheon, (L)
031B	289H303010	Mask, Equalizer Knob
032B	289H271010	Holder, Copy Button
033B	289H271020	Holder, Memo Button
034B	289H254020	Pin, Push Switch
035B	289H254010	Pin, Switch
036B	289H104020	Retainer, Front PWB
040B	51280308B0	B.H. Tapped Screw B3 x 8
042B	51280308B0	B.H. Tapped Screw B3 x 8
043B	51280308B0	B.H. Tapped Screw B3 x 8
044B	51280308B0	B.H. Tapped Screw B3 x 8
045B	51280308B0	B.H. Tapped Screw B3 x 8
046B	51280308B0	B.H. Tapped Screw B3 x 8
047B	51280308B0	B.H. Tapped Screw B3 x 8
048B	51280308B0	B.H. Tapped Screw B3 x 8
050B	288H053010	Cover, 3P Jack
052B	289H115010	Spring
053B	289H123010	Contact
054B	289H123020	Contact
055B	289H123030	Contact
030F	62041760W0	Lug
C001	DK18473310	Ceramic Cap. 0.047μF +80% -20%

M2961


[C02-99] LID (TOP/BOTTOM COVER)

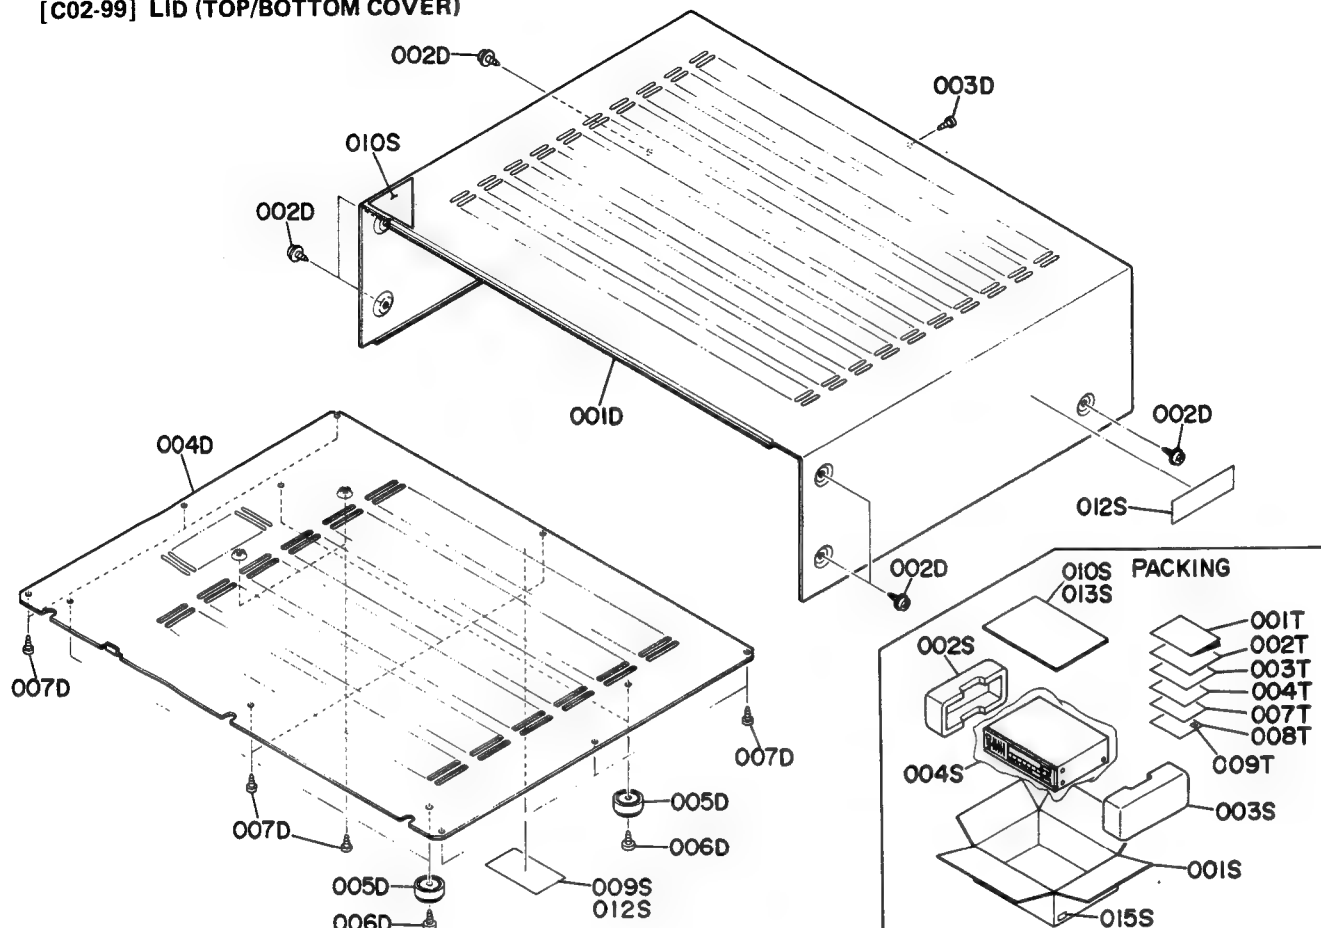

REF. DESIG.	PART NO.	DESCRIPTION
001D	289H257010	Lid, Top Cover; Gold
	289H257020	Lid, Top Cover; Black
002D	512B0408U0	B.T. Screw B4 x 8
003D	512B0308E0	B.H. Tapped Screw B3 x 8, Gold
	512B0308U0	B.H. Tapped Screw B3 x 8, Black
004D	289H257030	Lid, Bottom Cover
005D	011T057010	Leg
006D	512B0408B0	B.H. Tapped Screw B4 x 8
007D	512B0308B0	B.H. Tapped Screw B3 x 8
009S	2911861110	Label, Caution [N,E,A]
010S	105H861010	Label, 3 Year [U]
012S	117H861010	Label, Caution [U]
001S	290H801020	Packing Case (PM551), [U]
	290H801010	Packing Case (PM551), [N,A,F]
	290H801040	Packing Case (PM551), [E]
	289H801010	Packing Case (PM451), [N,A,F]
	289H801020	Packing Case (PM451), [E]
002S	289H809010	Cushion, Left
003S	289H809020	Cushion, Right
004S	9014336220	Polyethylene Bag

REF. DESIG.	PART NO.	DESCRIPTION
010S	289H807010	Reinforcing (PM451), [E]
013S	289H807010	Reinforcing (PM551), [E]
015S	9526019010	Serial No. Card [U]
	9526019060	Serial No. Card [N]
	9526019050	Serial No. Card [E]
	9526019030	Serial No. Card [A]
	9526019040	Serial No. Card [F]
001T	290H851210	User Manual [U]
	290H851310	User Manual [N,E,A]
	290H851110	User Manual [F]
002T	290H851210	User Manual, Spec [U]
	290H851320	User Manual, Spec [N,E,A]
003T	290H856010	Circuit Diagram (PM551), [N,E]
	289H856010	Circuit Diagram (PM451), [N,E]
004T	103H854010	Warranty Card [U]
	9631000090	Warranty Card [E]
	9631000130	Warranty Card [F]
007T	128T854010	Warranty Card [F]
008T	9611000050	User's Card [F]
009T	9540000010	License [F]

[C03-99] REAR PANEL

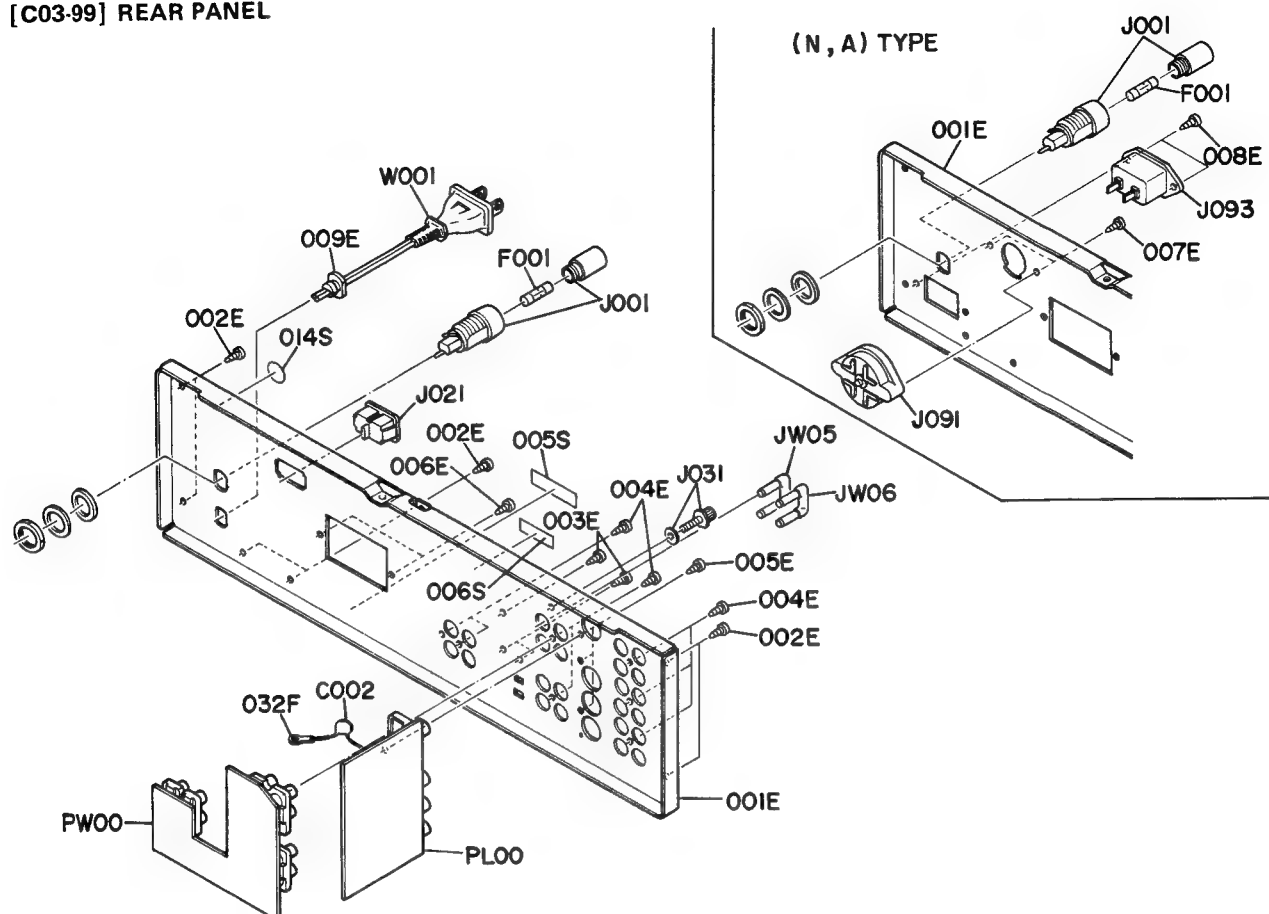


REF. DESIG.	PART NO.	DESCRIPTION
001E	290H250030	Rear Panel (PM551), [U]
	290H250010	Rear Panel (PM551), [N,A]
	290H250020	Rear Panel (PM551), [E]
	290H250040	Rear Panel (PM551), [F]
	289H250010	Rear Panel (PM451), [N,A]
	289H250020	Rear Panel (PM451), [E]
	289H250030	Rear Panel (PM451), [F]
002E	51280308B0	B.H. Tapped Screw B3 x 8
003E	51280308B0	B.H. Tapped Screw B3 x 8
004E	51280308B0	B.H. Tapped Screw B3 x 8
005E	51280308B0	B.H. Tapped Screw B3 x 8
006E	51280308B0	B.H. Tapped Screw B3 x 8
007E	51280308B0	B.H. Tapped Screw B3 x 8 [N,E,A]
008E	51280308B0	B.H. Tapped Screw B3 x 8 [N,A]
009E	1455259130	Bushing, AC Power Cord [U,E,F]
032F	62041760W0	Lug
005S	2112265010	Indicator, Serial No. [U]
	2112265110	Indicator, Serial No. [N,E,A,F]
006S	4581861010	Label, Made in Japan [N,E,A]
014S	9511101070	Label, UL [U]

REF. DESIG.	PART NO.	DESCRIPTION
Δ F001	FS10600500	Fuse 6A 250V (PM551), [U]
	FS10250800	Fuse 2.5A 250V (PM551), [N,E,A]
	FS10600600	Fuse 6A 250V (PM551), [F]
	FS10140800	Fuse 1.4A 250V (PM451), [N,E,A]
Δ J001	YJ08000300	Jack, Fuse Holder [U,F]
	YJ08000290	Jack, Fuse Holder [N,E,A]
Δ J021	YJ04001180	Jack, AC Outlet [U,E,F]
J031	YL03010250	Terminal, GND
Δ J091	BY05030040	Voltage Selector [N,A]
	BY05030050	Voltage Selector [E]
Δ J093	YP04000610	Plug, AC Inlet [N,A]
JW05	YQ01000080	Shote Plug
JW06	YQ01000080	Shote Plug
Δ W001	YC01900100	A.C. Power Cord [U]
	YC01900080	A.C. Power Cord [E,F]
C002	DK18473310	Ceramic Cap. 0.047μF +80% -20%

M2963

[C04-99] FRONT CHASSIS AND GENERAL PARTS

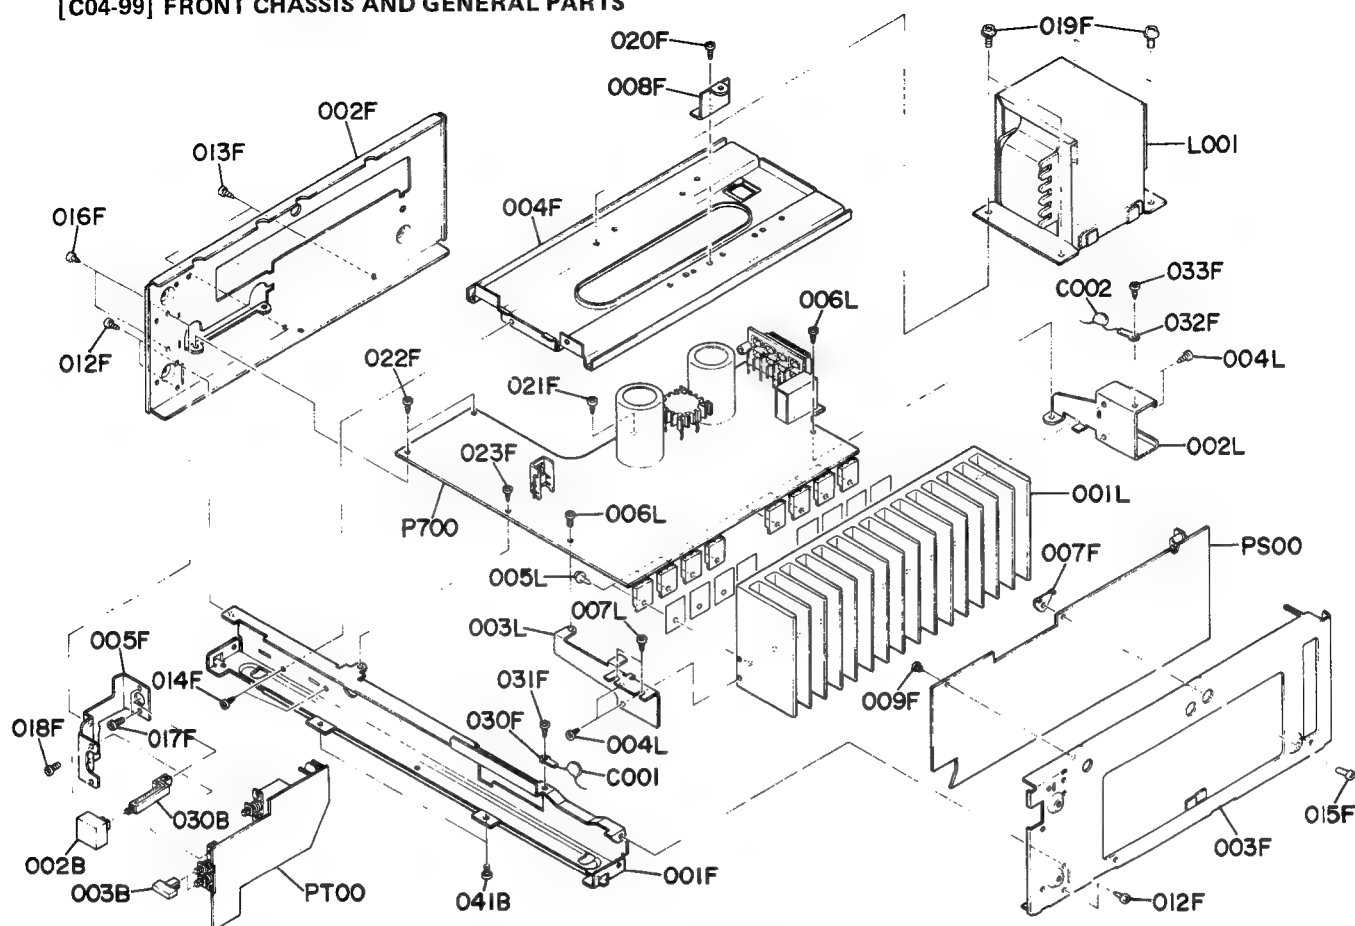

REF. DESIG.	PART NO.	DESCRIPTION
002B	158T270010	Button, Power Switch; Gold
	158T270110	Button, Power Switch; Black
003B	280H270010	Button, Speaker Switch; Gold
	280H270030	Button, Speaker Switch; Black
030B	289H121010	Link, Power Switch
041B	51280308B0	B.H. Tapped Screw B3 x 8
001F	289H126010	Stay, Front
002F	289H105020	Chassis, Side; (L)
003F	289H105030	Chassis, Side; (R)
004F	289H160010	Bracket, Power Transformer
005F	289H104010	Retainer, Power Switch
007F	270H011010	Nut, GND
008F	284H104020	Retainer, Main PWB
009F	2276005050	Clamper
012F	51280308B0	B.H. Tapped Screw B3 x 8
013F	51280308B0	B.H. Tapped Screw B3 x 8
014F	51280308B0	B.H. Tapped Screw B3 x 8
015F	51100308A0	B.H.M. Screw B3 x 8
016F	51280308B0	B.H. Tapped Screw B3 x 8
017F	51100308A0	B.H.M. Screw B3 x 8
018F	51100308A0	B.H.M. Screw B3 x 8
019F	52040408A0	H. Head Bolt, S.F. H4 x 8
020F	51500308B0	F.H. Taptite Screw F3 x 8
021F	51280308B0	B.H. Tapped Screw B3 x 8
022F	51280308B0	B.H. Tapped Screw B3 x 8
023F	51280308B0	B.H. Tapped Screw B3 x 8

REF. DESIG.	PART NO.	DESCRIPTION
030F	62041760W0	Lug
031F	51280308B0	B.H. Tapped Screw B3 x 8
032F	62041760W0	Lug
033F	51280308B0	B.H. Tapped Screw B3 x 8
001L	290H267010	Heatsink, Main (PM551)
	289H267010	Heatsink, Main (PM451)
002L	284H104010	Retainer, Rear
003L	284H104020	Retainer, Front
004L	51280308B0	B.H. Tapped Screw B3 x 8
005L	51780312B0	Fin Neck B.T Screw B3 x 12
006L	51100308A0	B.H.M. Screw B3 x 8
007L	51280308B0	B.H. Tapped Screw B3 x 8
△L001	TS19624020	Power Transformer (PM551), [U]
	TS19624030	Power Transformer (PM551), [N,A]
	TS19624040	Power Transformer (PM551), [E]
	TS19624010	Power Transformer (PM551), [F]
	TS17631010	Power Transformer (PM451), [N,A]
	TS17631030	Power Transformer (PM451), [E]
C001	DK18473310	Ceramic Cap. 0.047μF +80% -20%
C002	DK18473310	Ceramic Cap. 0.047μF +80% -20%

9. ELECTRICAL PARTS LIST

•(U): for U.S.A.
•(N): for Europe
•(E): for Europe
•(A): for Australia
•(F): for Japan

ASSIGNMENT OF COMMON PARTS CODES.

RESISTOR

R*:** (1) GD05 --- 140, Carbon film fixed resistor, $\pm 5\%$, 1/4W
R*:** (2) GD05 --- 160, Carbon film fixed resistor, $\pm 5\%$, 1/6W

① — Resistance value

Examples

① Resistance value
0.1 Ω ...001 10 Ω ...100 1k Ω ...102 100k Ω ...104
0.5 Ω ...005 18 Ω ...180 2.7k Ω ...272 680k Ω ...684
1 Ω ...010 100 Ω ...101 10k Ω ...103 1Mk Ω ...105
6.8 Ω ...068 390 Ω ...391 22k Ω ...223 4.7Mk Ω ...475

(Note) Please distinguish 1/4W from 1/6W by the shape of parts used actually.

C***: CERAMIC CAP.

(1) DD1 --- 370, Ceramic condenser
Disc type
Temp. coeff. P350 ~ N1000, 50V
① ②
Capacity value
Tolerance

Examples

① Tolerance (Capacity deviation)
 $\pm 0.25\text{pF}$...0
 $\pm 0.5\text{pF}$...1
 $\pm 5\%$...5

* Tolerance of COMMON PARTS handled here are as follows:

0.5pF ~ 5pF... $\pm 0.25\text{pF}$
6pF ~ 10pF... $\pm 0.5\text{pF}$
12pF ~ 560pF... $\pm 5\%$

② Capacity value
0.5pF...005 3pF...030 100pF...101
1pF...010 10pF...100 220pF...221
1.5pF...015 47pF...470 560pF...561

C***: CERAMIC CAP.

(1) DK16 --- 300, High dielectric constant ceramic condenser
Disc type
Temp. chara. 2B4, 50V
①
Capacity value

Example

② Capacity value
100pF...101 1000pF...102 10000pF...103
470pF...471 2200pF...222

C***: ELECTROLY CAP. ($\frac{\square}{\square}$), FILM CAP. ($\frac{\square}{\square}$)

(1) EA --- 10, Electrolytic condenser
One-way lead type, Tolerance $\pm 20\%$
① ②
Dielectric strength
Capacity value

Examples

① Capacity value
0.1 μF ...104 4.7 μF ...475 100 μF ...107
0.33 μF ...334 10 μF ...106 330 μF ...337
1 μF ...105 22 μF ...226 1100 μF ...108
2200 μF ...228

② Working voltage
6.3V...006 25V...025
10V...010 35V...035
16V...016 50V...050

(2) DF15 --- 350, Plastic film condenser
One-way type, Mylar $\pm 5\%$ 50V
①
Capacity value

Examples

① Capacity value
0.001 μF (1000pF)...102 0.1 μF ...104
0.0018 μF ...182 0.56 μF ...564
0.01 μF ...103 1 μF ...105
0.015 μF ...153

REF. DESIG.	PART NO.	DESCRIPTION
P700	YK290H1410 ZZ290H1410 ZZ289H8410	P700-MAIN AMP CIRCUIT BOARD P.W. Board, Main Amp P.W. Board Assembly (PM551) P.W. Board Assembly (PM451)
CK03 CN07	DK18102310 EA47606310	P700-CAPACITORS Ceramic 1000pF 50V (PM551) Elect 47 μF 63V
C717 C718 C719 C720 C729 C730	DD15101560 DD15101560 DD15101560 DD15101560 EA10710010 EA10706310 EA10710010 EA10706310	Ceramic 100pF $\pm 5\%$ 500V Ceramic 100pF $\pm 5\%$ 500V Ceramic 100pF $\pm 5\%$ 500V Ceramic 100pF $\pm 5\%$ 500V Elect 100 μF 100V (PM551) Elect 100 μF 63V (PM451) Elect 100 μF 100V (PM551) Elect 100 μF 63V (PM451)
C801 C809 Δ C813 Δ C814 C815 C816	DK18103560 DK18103310 DK18103560 DK18103560 EB82807110 EB68806320 EB82807110 EB68806320	Ceramic 0.01 μF +80% -20% 500V Ceramic 0.01 μF +80% -20% 50V Ceramic 0.01 μF +80% -20% 500V Ceramic 0.01 μF +80% -20% 500V Elect 8200 μF 71V (PM551) Elect 6800 μF 63V (PM451) Elect 8200 μF 71V (PM551) Elect 6800 μF 63V (PM451)
Δ RK01 Δ RK02 Δ RK11 Δ RK12	NH05331140 NH05331140 GG05101120 GP05102750	P700-RESISTORS 330 Ω $\pm 5\%$ 1/4W, Fusible (PM551) 330 Ω $\pm 5\%$ 1/4W, Fusible (PM551) 100 Ω $\pm 5\%$ 1/4W (PM551) 1K Ω $\pm 5\%$ 5W (PM551)
Δ RN01 Δ RN02 Δ RN16	NF02152140 NH05681140 NF02152140 NF05681140 GA05182010	1.5K Ω $\pm 2\%$ 1/4W, Fuse (PM551) 680 Ω $\pm 5\%$ 1/4W, Fusible (PM451) 1.5K Ω $\pm 2\%$ 1/4W, Fuse (PM551) 680 Ω $\pm 5\%$ 1/4W, Fusible (PM451) 1.8K Ω $\pm 5\%$ 1W
R717 R718 R719 R720 R725 R726 R729 R730 R731 R732	GG05470140 GG05470140 GG05820140 GG05820140 RA01020600 RA01020600 GG05221140 GG05221140 GG05221140 GG05221140	47 Ω $\pm 5\%$ 1/4W 47 Ω $\pm 5\%$ 1/4W 82 Ω $\pm 5\%$ 1/4W 82 Ω $\pm 5\%$ 1/4W 1K Ω (B), Trimming; Idle Current 1K Ω (B), Trimming; Idle Current 220 Ω $\pm 5\%$ 1/4W 220 Ω $\pm 5\%$ 1/4W 220 Ω $\pm 5\%$ 1/4W 220 Ω $\pm 5\%$ 1/4W
Δ R733 Δ R734 R735 R738 R739 R740 R741 R742 Δ R743	NH05221120 NH05221120 GG05068140 GG05082140 GG05082140 GG05082140 GG05082140 GG05082140 BW10000030 BW10000040	220 Ω $\pm 5\%$ 1/4W, Fusible 220 Ω $\pm 5\%$ 1/4W, Fusible 6.8 Ω $\pm 5\%$ 1/4W 8.2 Ω $\pm 5\%$ 1/4W (PM551) 8.2 Ω $\pm 5\%$ 1/4W (PM551) 8.2 Ω $\pm 5\%$ 1/4W (PM551) 8.2 Ω $\pm 5\%$ 1/4W (PM551) 8.2 Ω $\pm 5\%$ 1/4W (PM551) 0.27 Ω x2 $\pm 10\%$ 5W, Composite (PM551) 0.27 Ω x2 $\pm 10\%$ 3W, Composite (PM451)
Δ R744 R745 R746 R747	BW10000030 BW10000040 GG05022120 GG05022120 GA05047030	0.27 Ω x2 $\pm 10\%$ 5W, Composite (PM551) 0.27 Ω x2 $\pm 10\%$ 5W, Composite (PM451) 2.2 Ω $\pm 5\%$ 1/4W 2.2 Ω $\pm 5\%$ 1/4W 4.7 Ω $\pm 5\%$ 3W

REF. DESIG.	PART NO.	DESCRIPTION	
R748	GA05047030	4.7Ω	±5% 3W
Δ R751	NH05270140	27Ω	±5% ¼W, Fusible (PM551)
	NH05101140	100Ω	±5% ¼W, Fusible (PM451)
Δ R752	NH05270140	27Ω	±5% ¼W, Fusible (PM551)
	NH05101140	100Ω	±5% ¼W, Fusible (PM451)
R753	GA05822010	8.2KΩ	±5% 1W
Δ R756	GA05121010	120Ω	±5% 1W (PM551)
Δ R757	GA05121010	120Ω	±5% 1W (PM551)
Δ R801	NH05100120	10Ω	±5% ¼W, Fusible
R802	GG05471140	470Ω	±5% ¼W
R803	GA05151010	150Ω	±5% 1W
Δ R804	NH05100120	10Ω	±5% ¼W, Fusible
R805	GG05471140	470Ω	±5% ¼W
Δ R806	NH05022120	2.2Ω	±5% ¼W, Fusible
R807	GG05221140	220Ω	±5% ¼W
P700-SEMICONDUCTORS			
DK01	HD20001000	Diode 1S2473 or 1S1555 etc. (PM551)	
DN01	HD20022030	Diode	DSF10C
DN02	HD20022030	Diode	DSF10C
DN03	HD20003210	Diode	1S2471
DN04	HD20003210	Diode	1S2471
DN51	HD20001000	Diode	1S2473 or 1S1555 etc.
D701	HD20001000	Diode	1S2473 or 1S1555 etc.
D706			
D707	HD30012020	Zener	MA1150M
D708	HD30024020	Zener	MA1082M
Δ D801	HD20015030	Diode	DS135D
Δ D802	HD20015030	Diode	DS135D
Δ D803	HD20015030	Diode	DS135D
Δ D804	HD20015030	Diode	DS135D
D805	HD30020020	Zener	MA1160M
D806	HD30005020	Zener	MA1056M
D807	HD30020020	Zener	MA1160M
Δ D808	HD20015030	Diode	DS135D
Δ D809	HD20015030	Diode	DS135D
Δ D810	HD20015030	Diode	DS135D
Δ D811	HD20015030	Diode	DS135D
D812	HD30007020	Zener	MA1091M
D813	HD20001000	Diode	1S2473 or 1S1555 etc.
D814	HD20001000	Diode	1S2473 or 1S1555 etc.
D815	HD20001000	Diode	1S2473 or 1S1555 etc.
Δ D816	HE20012290	Diode	D5FB20 (PM551)
	HE20009290	Diode	S5VB20 (PM451)
D851	HD20015030	Diode	DS135D
QK01	HW10004320	Photo Unit	PC-827 (PM551)
QK02	HT309452B0	Transistor	2SC945(Q, R) (PM551)
Δ QK03	HT325511B0	Transistor	2SC2551 (PM551)
Δ QK04	HT325511B0	Transistor	2SC2551 (PM551)
QN01	HC10042050	IC	TA7317P
Δ QN02	HT109701A0	Transistor	2SA970(GR)
Δ QN03	HT322401A0	Transistor	2SC2240(GR)
Δ QN04	HT322401A0	Transistor	2SC2240(GR)
QN51	HT309452B0	Transistor	2SC945(Q, R)
QN52	HT111752D0	Transistor	2SA1175(EF, FF)
QN53	HF203722A0	F.E.T.	2SK372(GR, BL)
QN54	HF203722A0	F.E.T.	2SK372(GR, BL)

REF. DESIG.	PART NO.	DESCRIPTION	
Q701	HT112082A0	Transistor	2SA1208(R, S)
Q702	HT112082A0	Transistor	2SA1208(R, S)
Q703	HT329102A0	Transistor	2SC2910(R, S)
Q704	HT329102A0	Transistor	2SC2910(R, S)
Q705	HT309452B0	Transistor	2SC945(Q, R)
Q706	HT309452B0	Transistor	2SC945(Q, R)
Q707	HT332982D0	Transistor	2SC3298(O, Y)
Q708	HT332982D0	Transistor	2SC3298(O, Y)
Q709	HT113062D0	Transistor	2SA1306(O, Y)
Q710	HT113062D0	Transistor	2SA1306(O, Y)
Δ Q711	HT331822A0	Transistor	2SC3182(R, O)
Δ Q712	HT331822A0	Transistor	2SC3182(R, O)
Δ Q713	HT112652A0	Transistor	2SA1265(R, O)
Δ Q714	HT112652A0	Transistor	2SA1265(R, O)
Δ Q715	HT331822A0	Transistor	2SC3182(R, O) (PM551)
Δ Q716	HT331822A0	Transistor	2SC3182(R, O) (PM551)
Δ Q717	HT112652A0	Transistor	2SA1265(R, O) (PM551)
Δ Q718	HT112652A0	Transistor	2SA1265(R, O) (PM551)
Q719	HC10066020	IC	AN7062P
Q801	HT332982D0	Transistor	2SC3298(O, Y)
Q802	HT113062D0	Transistor	2SA1306(O, Y)
Q803	HT332982D0	Transistor	2SC3298(O, Y)
Q851	HT309452B0	Transistor	2SC945(Q, R)
Q852	HT309452B0	Transistor	2SC945(Q, R)
Q853	HT111752D0	Transistor	2SA1175(EF, FF)
P700-MISCELLANEOUS			
J701	YJ06002430	Jack, 3P	
J702	YT03080020	Terminal, 8P; Speaker	
J801	YJ06002440	Jack, 4P	
J802	YJ06002460	Jack, 7P	
J813	YL01010110	Terminal, GND	
LN01	LY20240190	Relay, Speaker Protector (PM551)	
	LY20240260	Relay, Speaker Protector (PM451)	
L701	LL23905120	Choke Coil 3.9mH	
L702	LL23905120	Choke Coil 3.9mH	
PF00-GRAPHIC EQUALIZER CIRCUIT BOARD			
PF00	YK290H1440	P.W. Board, Graphic Equalizer	
	ZZ290H1440	P.W. Board Assembly	
PF00-RESISTORS			
Δ RF19	GG05181140	180Ω ±5% ¼W	
Δ RF20	GG05181140	180Ω ±5% ¼W	
RF21	RY01040050	100KΩ(B), Variable; Band GEQ	
PF00-SEMICONDUCTORS			
QF01	HC10008090	IC	NJM4558DD
QF02	HC10036200	IC	M5227P
QF03	HC10036200	IC	M5227P
PF00-MISCELLANEOUS			
JF01	YJ06002440	Jack, 4P	
JF02	YJ06002390	Jack, 5P	
JF03	YJ06002460	Jack, 7P	
JF04	YJ06002460	Jack, 7P	
WF01	YU04140260	Jumper Lead, 4P	

REF. DESIG.	PART NO.	DESCRIPTION
PL00	YK290H1420 ZZ290H1420 ZZ290H8420	PL00-VISUAL SELECTOR CIRCUIT BOARD P.W. Board, Visual Selector P.W. Board Assembly [U,C,E,F] P.W. Board Assembly [N,A]
RL31 RL32	NK05221010 NK05221010	PL00-RESISTORS 220Ω ±5% 1W, Metal 220Ω ±5% 1W, Metal
DL01 DL02 DL03	HD30004020 HD30004020 HD20001000	PL00-SEMICONDUCTORS Zener MA1051M Zener MA1051M Diode 1S2473 or 1S155 etc.
QL01 QL02 QL03	HC406603C0 HT111752D0 HT327852D0	IC LC4066BH Transistor 2SA1175(FF, EF) Transistor 2SC2785(FF, EF)
QL08 QL09 QL10 QL11	HT111752D0 HT111752D0 HT111752D0 HT111752D0	Transistor 2SA1175(FF, EF) Transistor 2SA1175(FF, EF) Transistor 2SA1175(FF, EF)
JL01 JL02	YT02040560 YT02040340 YJ07001760	PL00-MISCELLANEOUS Terminal, 4P; Video IN [U,C,E,F] Terminal, 4P; Video IN [N,A] Jack, 6P
PS00	YK290H1530 ZZ290H1530	PS00-INPUT SELECTOR CIRCUIT BOARD P.W. Board, Input Selector P.W. Board Assembly
CS18 CS19 CS20 CS21 CS22 CS23	DK18103310 DK18103310 DK18103310 DK18103310 DK18103310 DK18103310	PS00-CAPACITORS Ceramic 0.01μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V
C407 C408	DK18102310 DK18102310	Ceramic 1000pF +80% -20% 50V Ceramic 1000pF +80% -20% 50V
Δ RS37 Δ RS38	GG05181140 GG05181140	PS00-RESISTORS 180Ω ±5% ¼W 180Ω ±5% ¼W
Δ R415 Δ R416	GG05181140 GG05181140	180Ω ±5% ¼W 180Ω ±5% ¼W
QS01 QS02 QS03 QS04 QS05 QS06 QS07 QS08 QS09 QS10	HC10117050 HC10150030 HC10118050 HC10008090 HC10150030 HC10150030 HC10008090 HT30001000 HT10001000 HT10001000	PS00-SEMICONDUCTORS IC TC9163N IC LC4966 IC TC9176P IC NJM4558DD IC LC4966 IC LC4966 IC NJM4558DD Transistor 2SC536SP(F, G) etc. Transistor 2SA608SP(F, G) etc. Transistor 2SA608SP(F, G) etc.
Q401	HC10008090	IC NJM4558DD

REF. DESIG.	PART NO.	DESCRIPTION
JS01 JS02 JS03 JS05 JS06 JS07 JS08 JS09 JS10 JS11 JS12	YT02040610 YT02040500 YT02040500 YJ06002450 YJ06002450 YJ06002440 YJ06002430 YJ06002430 YJ06002460 YJ06002270 YL01010110	PS00-MISCELLANEOUS Terminal, 4P; Phone/CD Terminal, 4P; Tuner/TV Terminal, 4P, Tape IN/OUT Jack, 6P Jack, 6P Jack, 4P Jack, 3P Jack, 3P Jack, 7P Jack, 8P Terminal, Earth
WL01 WS02	YU06160260 YU03080260	Jumper Lead, 6P Jumper Lead, 3P
PT00	YK290H1430 ZZ290H1430 ZZ290H2430	PT00-SPEAKER SWITCH CIRCUIT BOARD P.W. Board, Speaker Switch P.W. Board Assembly (BLACK) P.W. Board Assembly (GOLD)
Δ CT01	DK18103840 DK18103850	PT00-CAPACITOR Ceramic 0.01μF 250V Ceramic 0.01μF 250V [F]
RT01 RT02	GA05331030 GA05331030	PT00-RESISTORS 330Ω ±5% 3W 330Ω ±5% 3W
JT01	YJ01002080 YJ01001790	PT00-MISCELLANEOUS Jack, Phone (Black) Jack, Phone (Grey)
ST01 Δ ST02	SP04020480 SP01010960	Push Switch, Speaker Push Switch, Power
W701 W702	YU03280240 YU05300240	Jumper Lead, 3P Jumper Lead, 5P
PU00	YK290H1510 ZZ290H1510	PU00-FRONT SWITCH CIRCUIT BOARD P.W. Board, Front Switch P.W. Board Assembly
CG02 CU01 CU05 CU06	DF16333350 EJ10505010 DF16104350 DF16104350	PU00-CAPACITORS Film 0.033μF ±10% 50V Elect 1μF 50V Film 0.1μF ±10% 50V Film 0.1μF ±10% 50V
DU01 ? DU20 DU21 DU22 DU23 DU24 DU25 DU26 ? DU32	HD20015210 H110038030 H110052030 H110052030 H110052030 H110053030 HD20015210	PU00-SEMICONDUCTORS Diode 1SS133 L.E.D. SLP-281F L.E.D. SLP-274B L.E.D. SLP-274B L.E.D. SLP-274B L.E.D. SLP-174B Diode 1SS133

REF. DESIG.	PART NO.	DESCRIPTION	
QG01	HT327852D0	Transistor	2SC2785(FF, EF)
QG02	HT327852D0	Transistor	2SC2785(FF, EF)
QU01	HC10169030	IC	LM6502C
QU02	HC401100B0	IC	4011
QU04	HT30001000	Transistor	2SC536SP(F, G) etc.
QU05	HT30001000	Transistor	2SC536SP(F, G) etc.
QU06	HT30001000	Transistor	2SC536SP(F, G) etc.
QU07			
QU14	HT327852D0	Transistor	2SC2785(FF, EF)
QU15	HT111752D0	Transistor	2SA1175(FF, EF)
JU05	YJ06002390	PU00-MISCELLANEOUS Jack, 5P	
SG01	SP02011270	Push Switch, SPH	
SU01			
SU16	SP01011000	Push Switch, KHH	
SU17	SP02011270	Push Switch, SPH	
SU18	SP02011270	Push Switch, SPH	
SU19	SP02011270	Push Switch, SPH	
SU20	SP02011270	Push Switch, SPH	
VU01			
VU07	IN10080650	Lamp	50mA 8V
WU01	YU05400260	Jumper Lead, 5P	
WU02	YU08140260	Jumper Lead, 8P	
WU03	YU07120260	Jumper Lead, 7P	
WU04	YU07140260	Jumper Lead, 7P	
WU06	YU05090260	Jumper Lead, 5P	
WU07	YU03180260	Jumper Lead, 3P	
WU08	YU06080260	Jumper Lead, 6P	
WU09	YU05080260	Jumper Lead, 5P	
XU01	FQ04003010	Ceramic Vibrator, CSB-400P	
PU50	YK290H1520 ZZ290H1520	PU50-VOLUME INDICATOR CIRCUIT BOARD P.W. Board, Volume Indicator P.W. Board Assembly	
DU51			
DU61	HI10038030	L.E.D.	SLP-281F, Green
QU51	HC10001260	IC	MSM59371RS
QU52			
QU62	HT327852D0	Transistor	2SC2785(FF, EF)

REF. DESIG.	PART NO.	DESCRIPTION	
PV00	YK290H1550 ZZ290H1550	PV00-VD INPUT CIRCUIT BOARD P.W. Board, VD Input P.W. Board Assembly	
CV01	DK18473310	Ceramic Cap. 0.047 μ F +80% -20% 50V	
JV01	YT02030020	Terminal, 3P	
WV01	YU03120260	Jumper Lead, 3P	
PW00	YK290H1520 ZZ290H1520	PW00-VCR EASY REMOTE INPUT CIRCUIT BOARD P.W. Board, VCR Easy Remote Input P.W. Board Assembly	
CW05	DK18473310	Ceramic Cap. 0.047 μ F	
CW08	DK18473310	Ceramic Cap. 0.047 μ F	
JW01	YT02040620	Terminal, 4P; VCR IN/OUT	
JW02	YT02020340	Terminal, 2P; Remote IN/OUT	
JW03	YT02020540	Terminal, 2P; Easy IN/OUT	
JW04	YT02040590	Terminal, 4P; Surround IN/OUT	
JW05	YQ01000080	Shote Plug	
JW06	YQ01000080	Shote Plug	
JW07	YJ07001750	Jack, 5P	
SW01	SS01020520	Slide Switch, VCR Mono/Stereo	
SW02	SS01020520	Slide Switch, Remote IN/OUT	
WW01	YU06140260	Jumper Lead, 6P	
WW02	YU06180260	Jumper Lead, 6P	

(W01-99)	Assembly and Wiring
(T01-99)	Adjustment
(X01-00)	Correction

NOTE ON SAFETY:

Symbol \triangle Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol \triangle . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

10. TECHNICAL SPECIFICATIONS

(Model PM451)

AUDIO SECTION

POWER OUTPUT PER CHANNEL

DIN 4 OHMS	80 W
RMS 4 OHMS	60 W
DIN 8 OHMS	70 W
RMS 8 OHMS	60 W
TOTAL HARMONIC DISTORTION AT RMS 8 OHMS	0.05%
I.M. DISTORTION	0.05%
DAMPING FACTOR 8 OHMS (1 kHz)	35

Frequency Response 10 Hz ~ 25 kHz

MM CARTRIDGE INPUT

Frequency Response (RIAA)	±0.5 dB
Signal to Noise Ratio	80 dB
Input Impedance	47 k ohms
Input Capacitance	330 pF
Input Sensitivity	2.5 mV
Equivalent Input Noise	1.6 µV
Dynamic Range	103 dB

AUX. INPUT

Input Impedance	22 k ohms
Input Sensitivity	150 mV
Frequency Response	10 Hz ~ 25 kHz
Signal to Noise Ratio	93 dB

OUTPUT VOLTAGE

Tape Out	150 mV
----------	--------

OUTPUT IMPEDANCE

Tape Out	550 ohms
----------	----------

GENERAL

Power Requirements	N and T versions	220/240 V AC, 50/60 Hz
	E version	110/120/220/240 V AC, 50/60 Hz
Power Consumption at Rated Output, both Channels Driven		270 W
Dimensions		
Panel Width		420 mm
Panel Height		118 mm
Depth		329 mm
Weight		
Unit Alone		8.3 kg

Specifications and appearance are subject to change for modification without notice.

(Model PM551)

AUDIO SECTION

POWER OUTPUT PER CHANNEL

DIN 4 OHMS	115 W
RMS 4 OHMS	100 W
DIN 8 OHMS	110 W
RMS 8 OHMS	100 W
TOTAL HARMONIC DISTORTION AT RMS 8 OHMS	0.05%
I.M. DISTORTION	0.05%
DAMPING FACTOR 8 OHMS (1 kHz)	35

Frequency Response 10 Hz ~ 25 kHz

MM CARTRIDGE INPUT

Frequency Response (RIAA)	±0.5 dB
Signal to Noise Ratio	80 dB
Input Impedance	47 k ohms
Input Capacitance	330 pF
Input Sensitivity	2.5 mV
Equivalent Input Noise	1.6 µV
Dynamic Range	103 dB

AUX. INPUT

Input Impedance	22 k ohms
Input Sensitivity	150 mV
Frequency Response	10 Hz ~ 25 kHz
Signal to Noise Ratio	95 dB

OUTPUT VOLTAGE

Tape Out	150 mV
----------	--------

OUTPUT IMPEDANCE


Tape Out	550 ohms
----------	----------

GENERAL

Power Requirements	N and T versions	220/240 V AC, 50/60 Hz
	E version	110/120/220/240 V AC, 50/60 Hz
Power Consumption at Rated Output, both Channels Driven		380 W
Dimensions		
Panel Width		420 mm
Panel Height		118 mm
Depth		329 mm
Weight		
Unit Alone		10.4 kg

Specifications and appearance are subject to change for modification without notice.

11. SCHEMATIC DIAGRAM

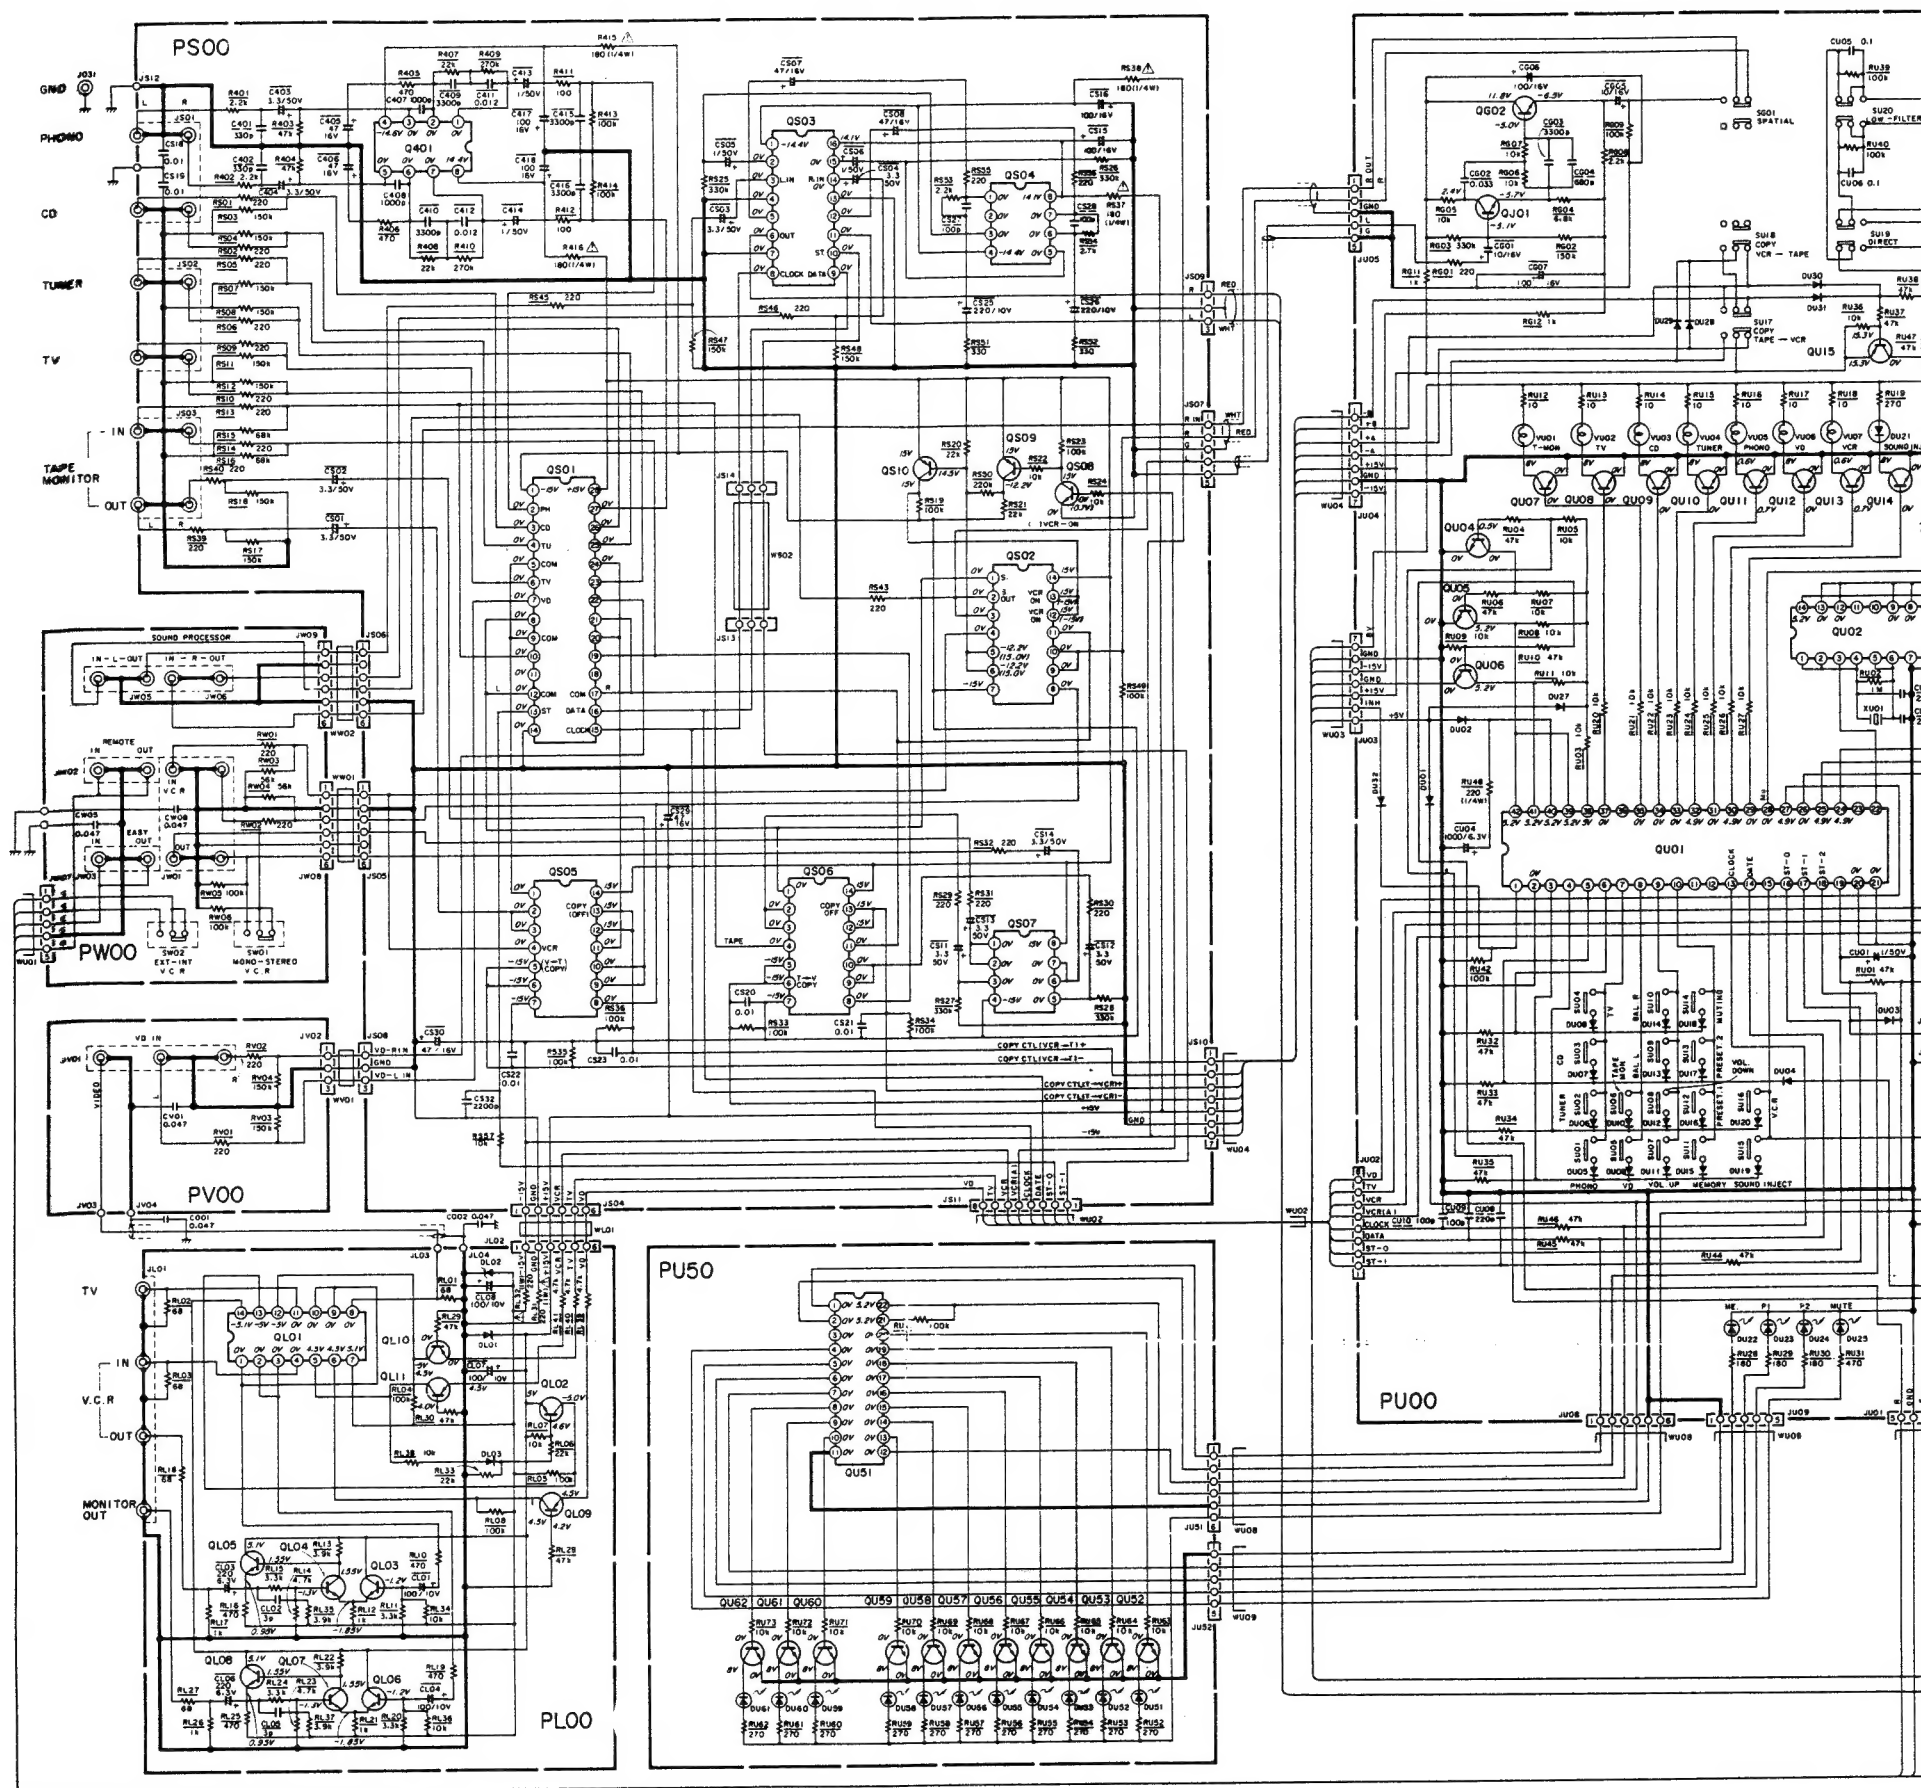



F001	FS10140800	FUSE 1.4A 250V
F002	FS10315800	FUSE 3.15A 250V [E]
L001	TS17631010	POWER TRANSF. [N, A]
L001	TS17631030	POWER TRANSF. [E]
ST01	SP04020480	PUSH SWITCH SPEAKER
ST02	SP01010960	PUSH SWITCH POWER
LN01	LY20240260	RELAY SPEAKER PROTECTOR

SG01	SP02011270	PUSH SWITCH
SU01		
	SP01011000	PUSH SWITCH
SU16		
SU17		
	SP02011270	PUSH SWITCH
SU20		
VU01		
	IN10080650	LAMP 8V 50 mA
VU07		
SW01	SS01020520	SLIDE SWITCH VCR
SW02	SS01020520	SLIDE SWITCH REMOTE
RF21	RY01040050	VARIABLE 100KΩ


M2971

NOTE ON SAFETY :

Symbol  Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

Components and wiring

Model PM451

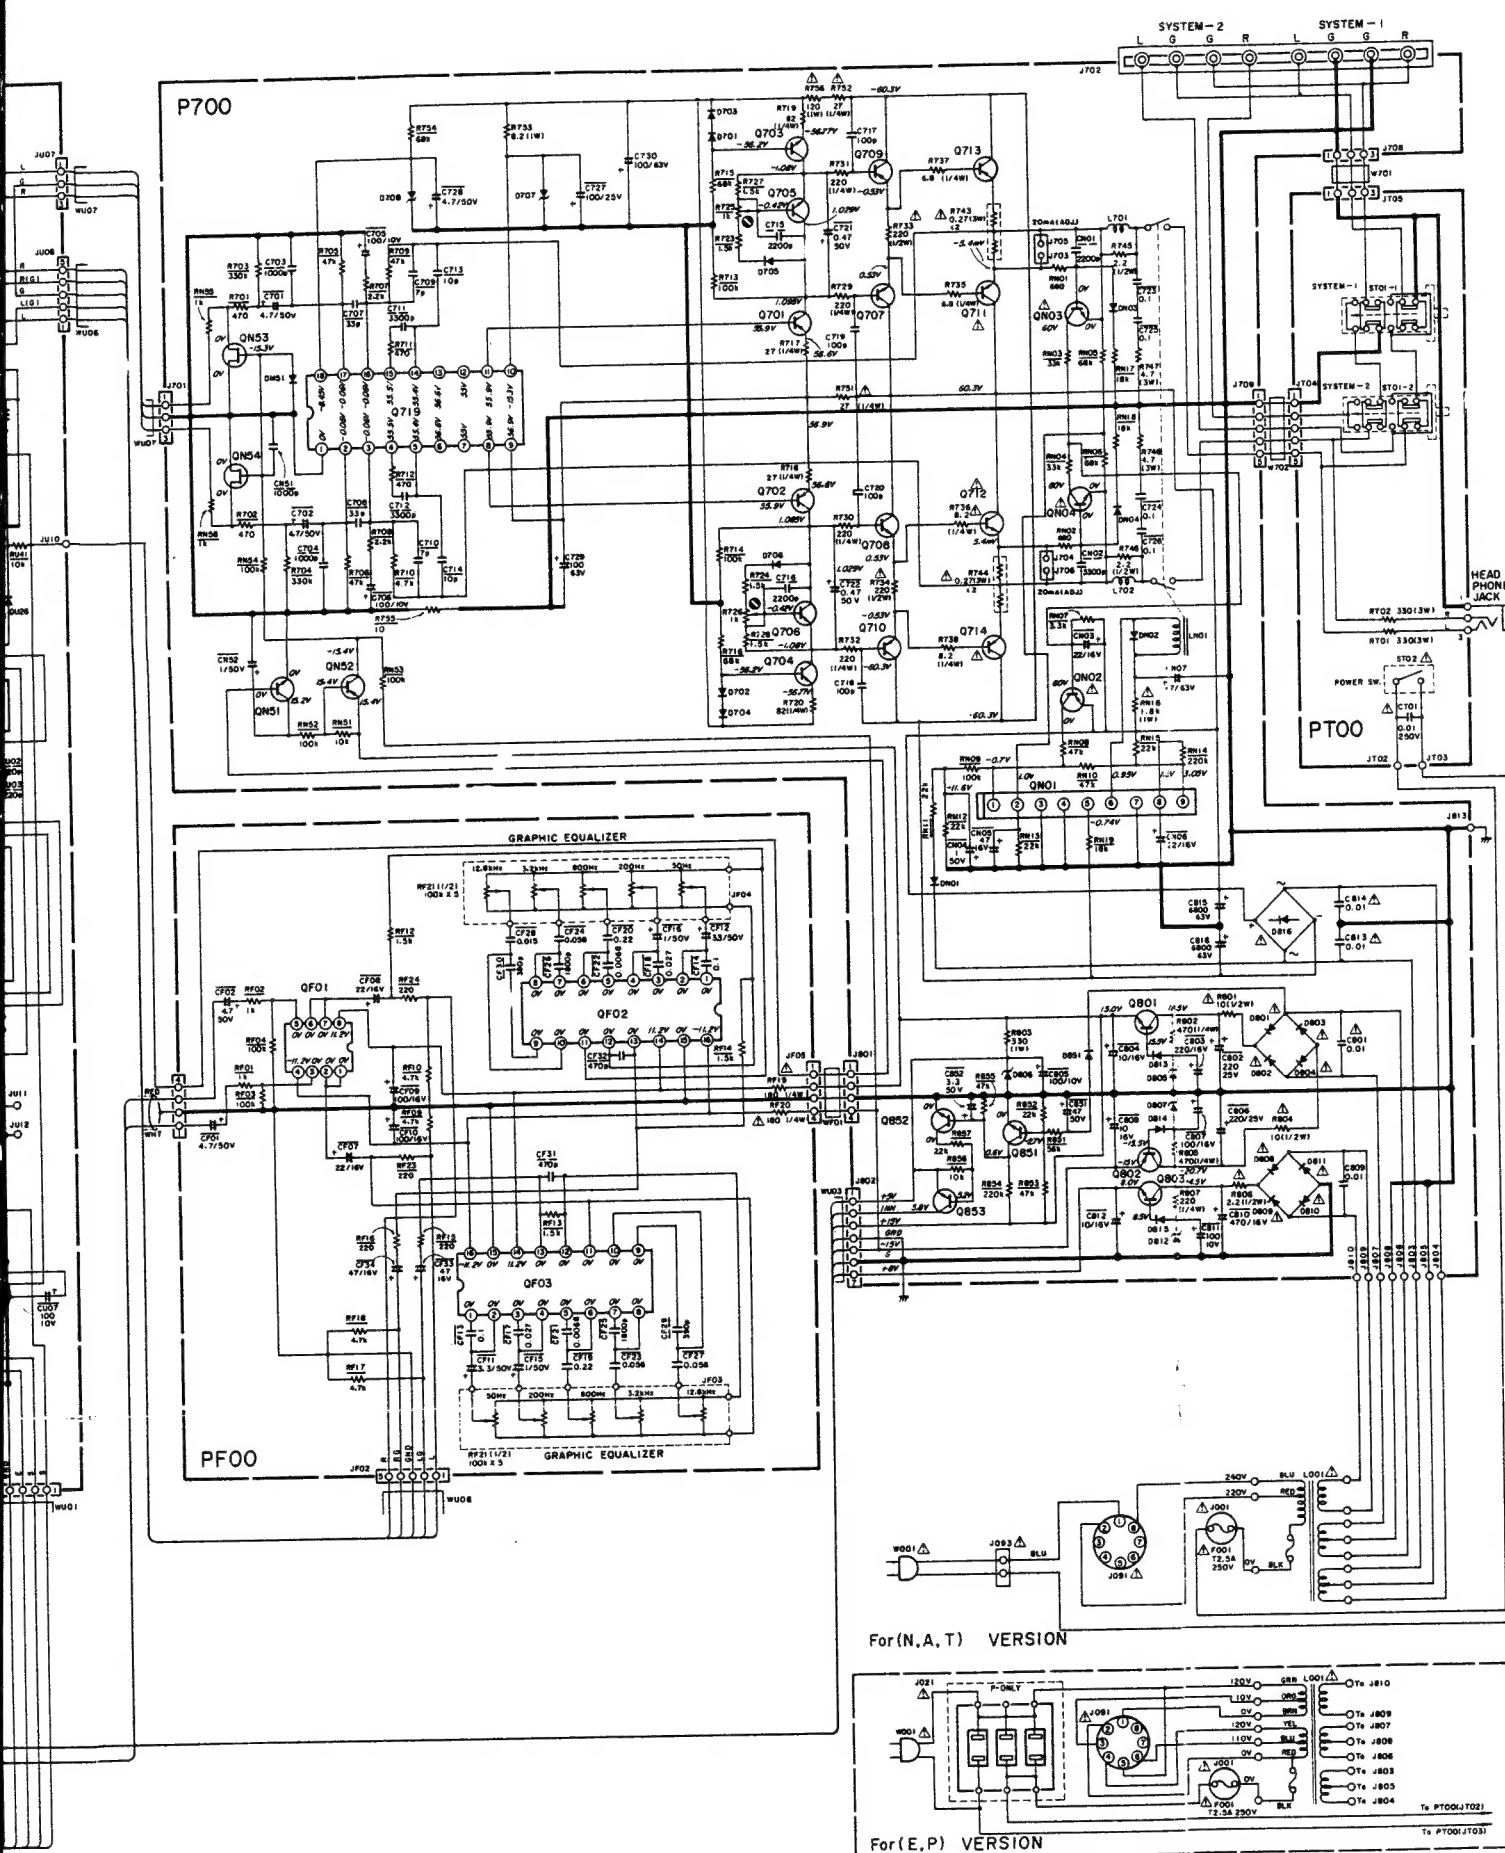

- | | | | |
|--|---|--------------------|-------------------------------|
| 0701, 0702
HT112082A0
2SA1208(R, S) | 0701 ~ 0706
D813 ~ D815
DL03, DN51
HD20001000
1S2473, 1S1555 etc. | | |
| 0703, 0704
HT329102A0
25C2910(R, S) | 0707
HD30012020
MA1150 | | |
| 0707, 0708, 0801
0803
HT132982D0
25C298(R, Y) | 0708
HD30024020
MA1082 | 2SA970 (GR) | 25C945 (O, R)
25C2240 (GR) |
| 0709, 0710, 0802
HT11306200
2SA1306(O, Y) | 0805, 0807
HD30020020
MA1160 | | |
| 0711, 0712
HT331822A0
25C3182(R, O) | 0806
HD30005020
MA1056 | | |
| 0713, 0714
HT112532A0
2SA1265(R, O) | 0812
HD30007020
MA1091 | | |
| 0719
HC10066020
AN7062P | 0816
HE20009290
SSV820 | 25C2785 (FF, EF) | 2SA1175 (FF, EF) |
| 0851, 0852
0705, 0706, QN51
HT309452B0
25C945(O, R) | 0801 ~ 0804
0808 ~ 0811, 0851
HD20015030
DS1550 | | |
| 0853, 0L02, 0L15
QN52, 0L09 ~ 0L11
HT11752D0
2SA1175(FF, EF) | DL01, 0L02
HD30004020
MA1051M | | |
| QF01, 0401, 0504
Q507
HC10008090
NJM4556B0 | DN01, DN02
HD20022030
DSF10C | 2SK372 (GR, BL) | 25C3298 (O, Y) |
| QF02, QF03
HC10036200
M5227P | DN03, DN04
HD20003210
1S2471 | | 2SA1306(O, Y) |
| QG01, QG02
QL03 ~ QL08
QU07 ~ QU14
QUS2 ~ QUS2
HT327852D0
25C2785(FF, EF) | DU21
DU51 ~ DU61
H10038030
SLP-281F | TOP VIEW
 | NJM4558B-D |
| QN03, QN04
HT322401A0
25C2240 (GR) | DU22 ~ DU24
H110052030
SLP-2748 | TOP VIEW
 | TOP VIEW
 |
| QL01
HC406603C0
LC4066BH | DU25
H110053030
SLP-1748 | 40411BC | M5227P |
| QN01
HC10042050
TA7317P | DU01 ~ DU20
DU26 ~ DU29
DU32
HD20015211
1S1133 | | TC9176P |
| QN02
HT109701A0
25A970 (GR) | QUS3
HT327852D0
25C2785(FF, EF) | LC4066BH
LC4966 | AN7062P |
| QN53, QN54
HF203722A0
25K372 (GR, BL) | Q501
HC10117050
TC9163N | TOP VIEW
 | TOP VIEW
 |
| Q502, Q505
HC10150030
LC4966 | Q501
HC10110500
TC9176P | FRONT VIEW
 | TOP VIEW
 |
| QU01
HC10169030
LC8502C | QU02
HC40110080
D4011BC | TC9163N | LC8502C |
| QU51
HC10001260
MSM59371RS | | | |

**"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONNEL ONLY –
ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS A NON-WARRANTY
REPAIR BY ANY MARANTZ SERVICE CENTRE –"**

Kind of Common Parts

RESISTOR

- RESISTOR**
R*** (1) GD05 - - 140, Carbon film fixed resistor, $\pm 5\%$ 1/4W
R*** (2) GD05 - - 160, Carbon film fixed resistor, $\pm 5\%$ 1/6W

C*** : CERAMIC CAP.

- (1) DD1 ---- 370, Ceramic condenser,
disc type (titan condenser)
Temp. coeff. P350 ~ N1000 50V


C*** : CERAMIC CAP.

- (1) DK16 --- 300, High dielectric constant ceramic condenser,
disc type (titan variable)
Temp. chara. 2B4 50V

*** : ELECTROLY CAP. (∇) / FILM CAP. (\equiv)

- (1) EA ----- 10, Electrolytic condenser,
one-way lead type, tolerance $\pm 20\%$
- (2) DF15 --- 350, Plastic film condenser,
one-way type, Mylar, $\pm 5\%$ 50V

* in case of ordering the common parts, please establish the correct parts number of 10 figures by the procedure "ASSIGNMENT OF COMMON PARTS CODES"

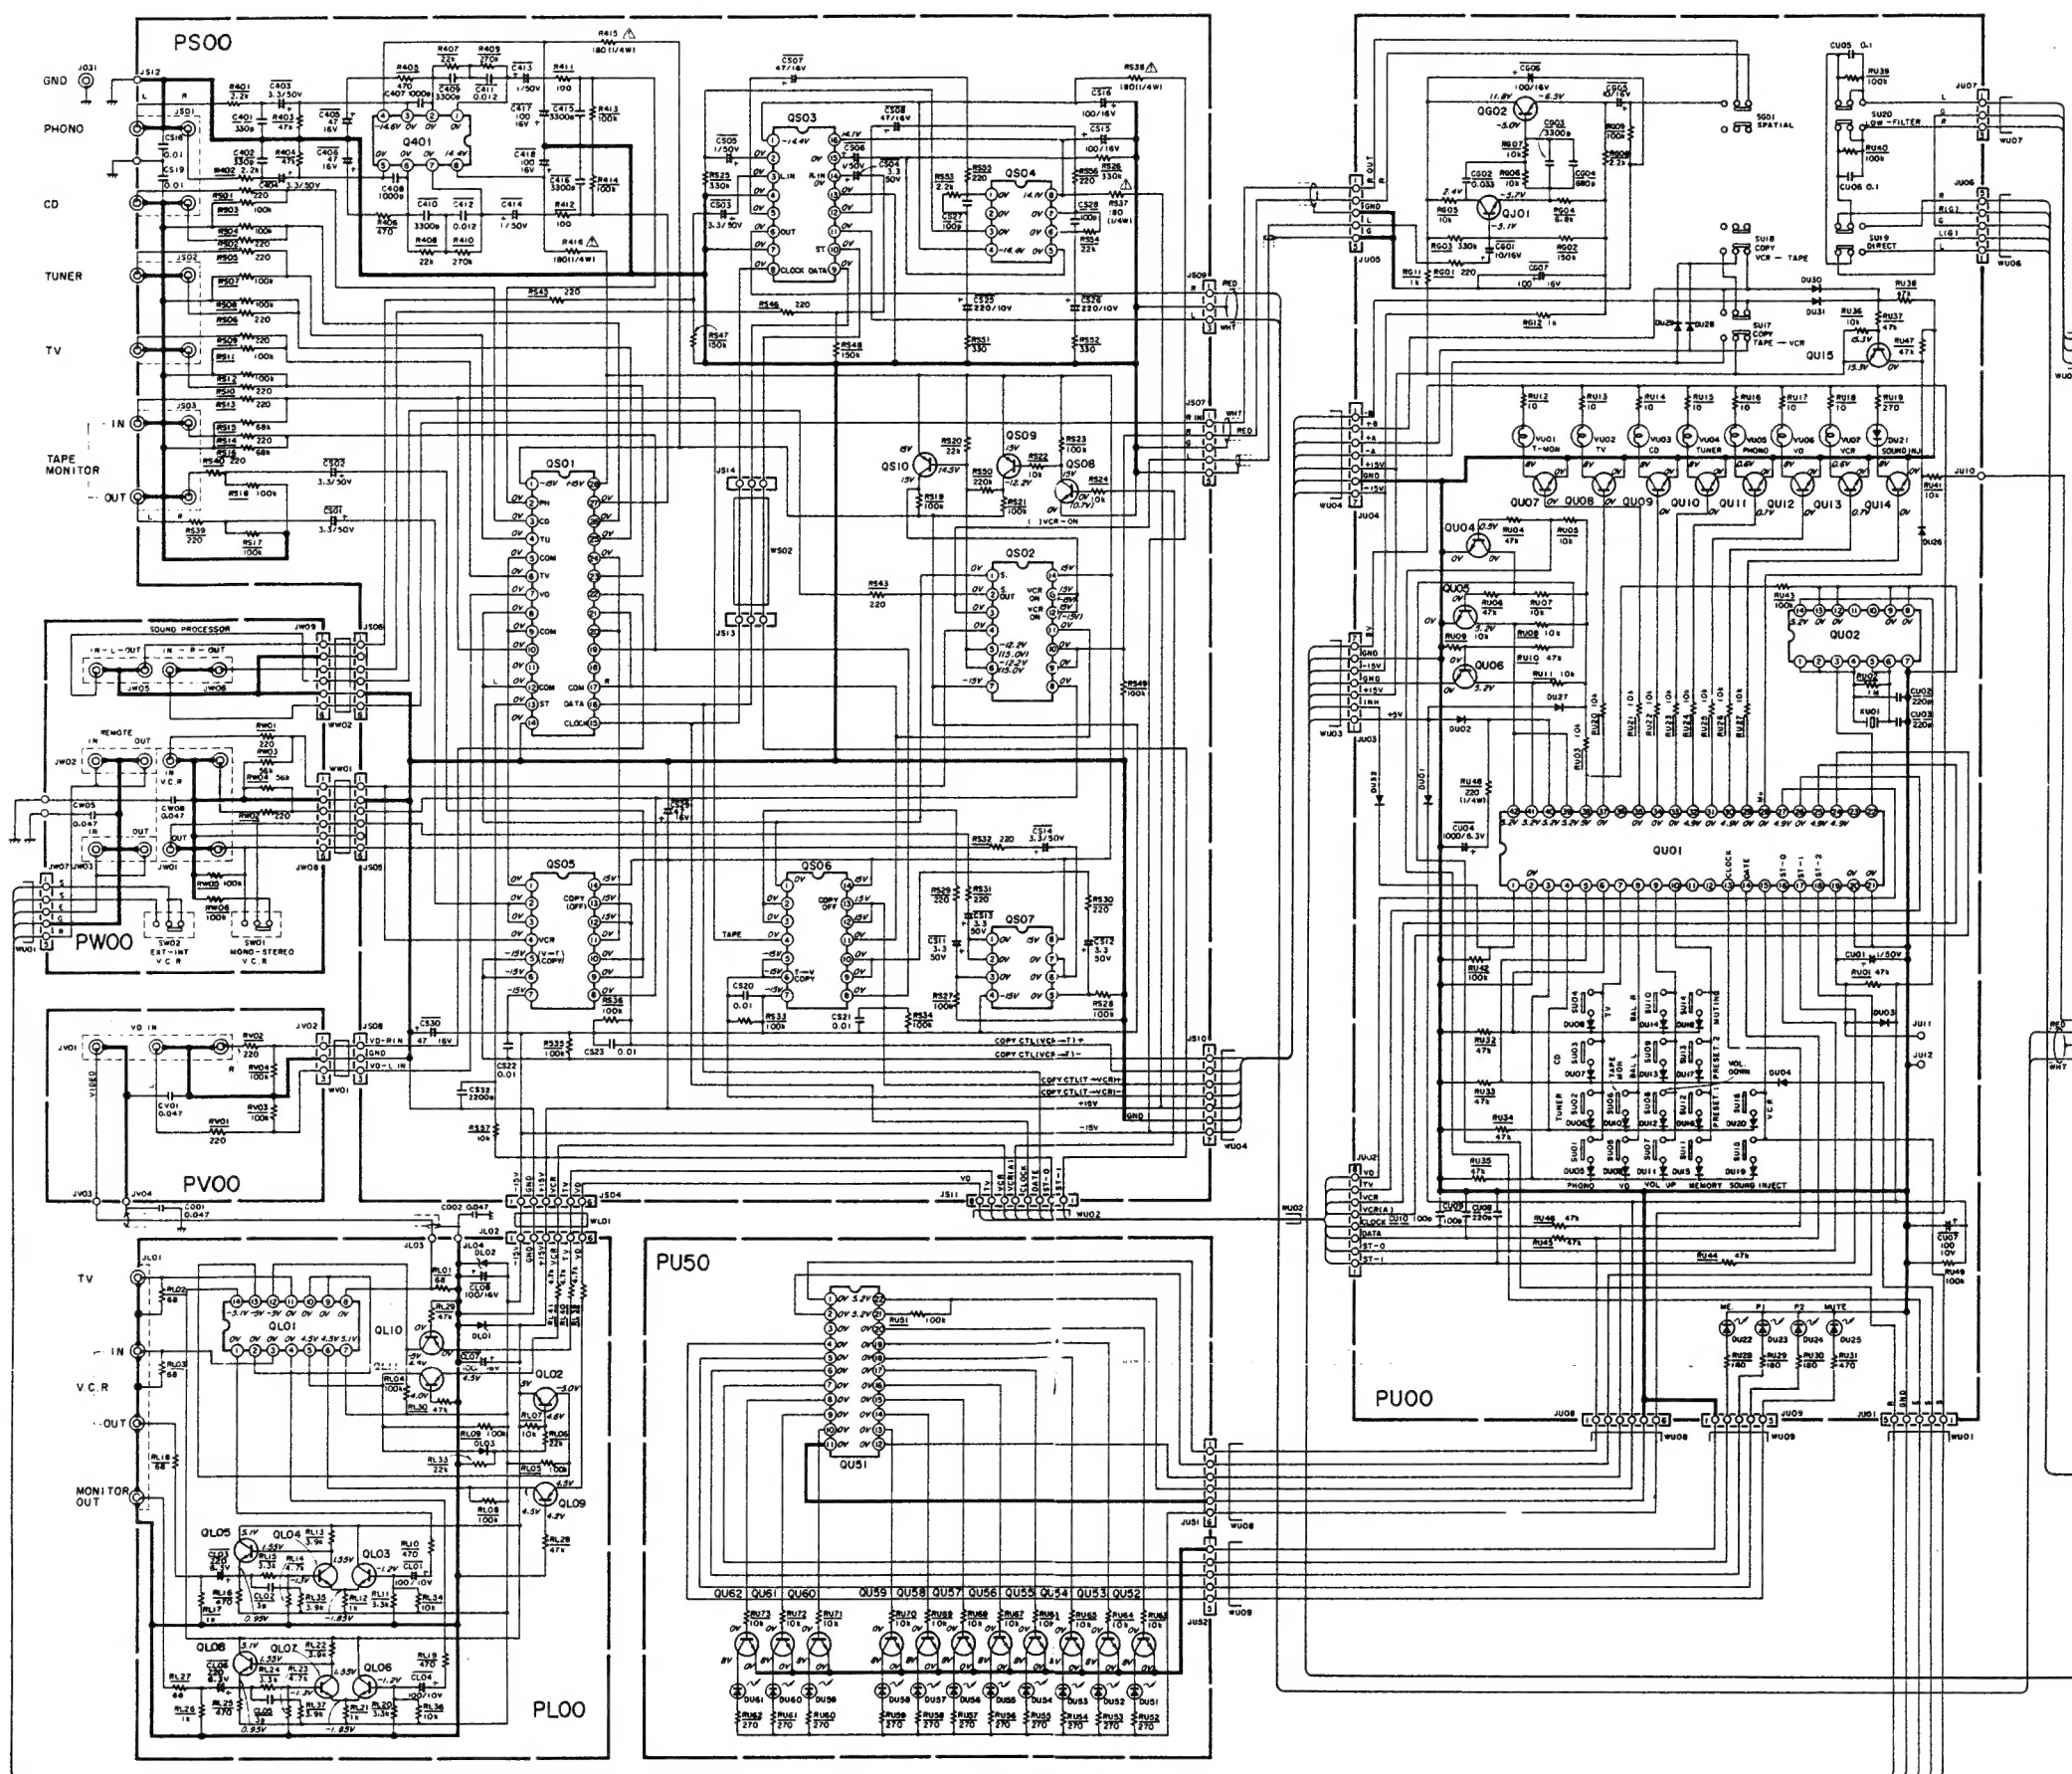

F001	FS10250800	FUSE 2.5A 250V [N, E, A]
F001	FS10600500	FUSE 6A 250V [U, C]
F001	FS1050800	FUSE 5A 250V [P]
F002	FS1050800	FUSE 5A 250V [E]
F002	FS10250800	FUSE 2.5A 250V [P]
L001	TS19624030	POWER TRANSF. [N, A]
L001	TS19624020	POWER TRANSF. [U, C]
L001	TS19624040	POWER TRANSF. [E]
ST01	SP04020480	PUSH SWITCH SPEAKER
ST02	SP01010960	PUSH SWITCH POWER
LN01	LY20240190	RELAY SPEAKER PROTECTOR


SG01	SP02011270	PUSH SWITCH
SU01		
?	SP01011000	PUSH SWITCH
SU16		
SU17		
?	SP02011270	PUSH SWITCH
SU20		
VU01		
?	IN10080650	LAMP 8V 50 mA
VU07		
SW01	SS01020520	SLIDE SWITCH VCR
SW02	SS01020520	SLIDE SWITCH REMOTE
RF21	RY01040050	VARIABLE 100KΩ

NOTE ON SAFETY :

Symbol Δ Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol Δ . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

Components and wiring are subject to

Model PM551

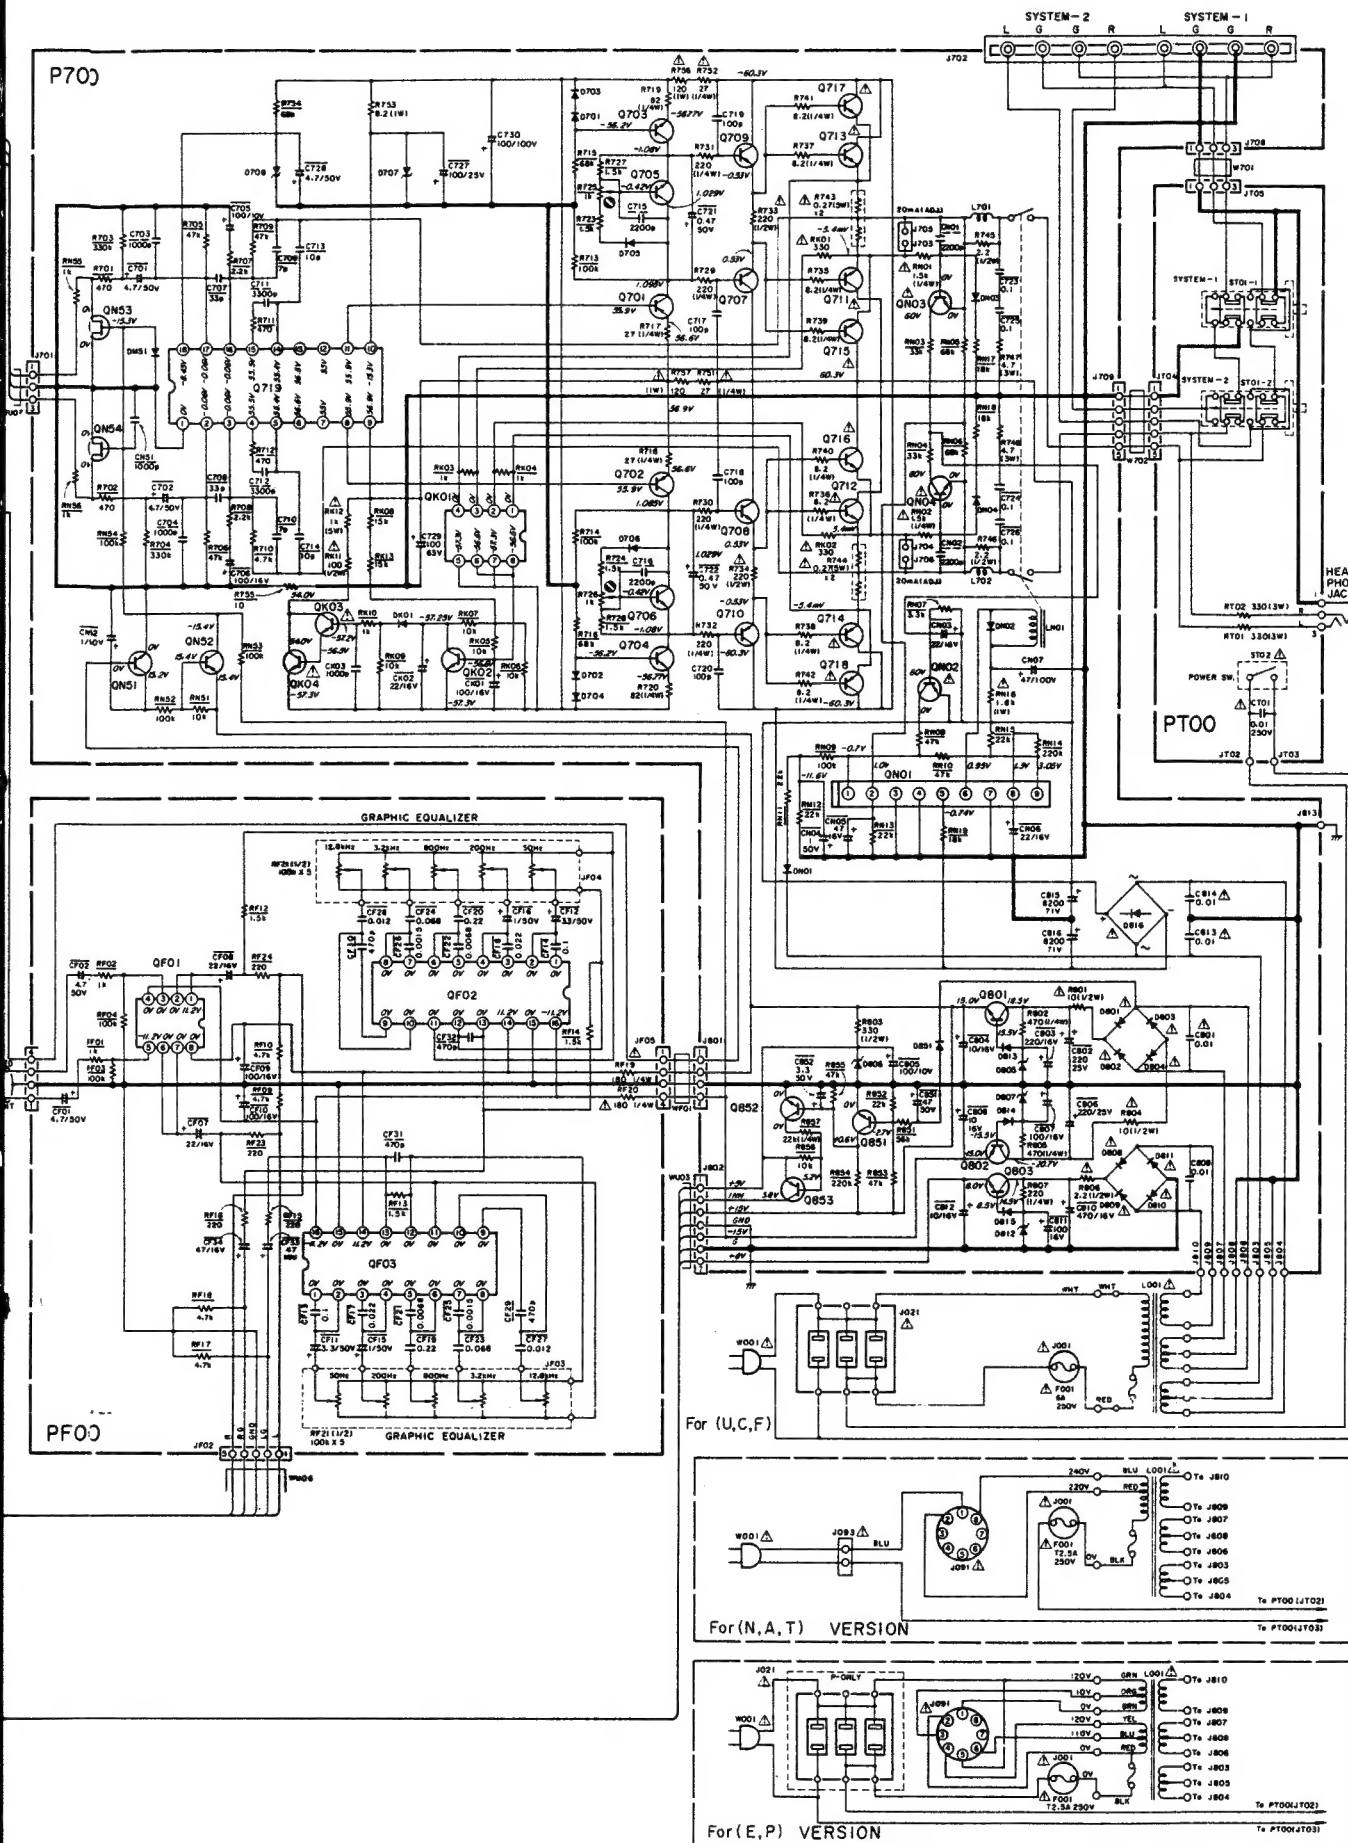

Q701, Q702
HT112082A0
25A1208(R, S)

Q703, Q704
HT329102A0
25C2910(R, S)

Q707, Q708, Q801
Q803
HT33296200
25C3296(R, S)

Q709, Q710, Q802
HT11306200
25A1306(R, S)

Q711, Q712, Q715
Q716
HT331822A0
25C3182(R, S)

Q713, Q714, Q717
Q718
HT112652A0
25A1265(R, S)

Q719
HC10066020
AN7062P

Q851, Q852, Q802
Q705, Q706, Q851
HT30945280
25C945(R, S)

Q853, Q802, Q815
Q852, Q809~Q811
HT1175200
25A1175(R, S)

Q801, Q401, Q804
Q807
HC10008090
NJM4558D

Q802, Q803
HC10036200
M5227P

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q801, Q802
Q803~Q808
Q809~Q811, Q851
HT30945280
25C945(R, S)

Q701~Q706
D813~D815
DK01, DL03, DN51
HD20001000
IS2473, IS1555 etc.

D707
HD30012020
MA1150

D708
HD30024020
MA1082

D805, D807
HD30020020
MA1160

D806
HD30009020
MA1056

D812
HD30007020
MA1091

D816
HD20012290
D5F820

D801~D804
D805~D811, D851
HD20005030
DS1350

DL01, DL02
HD30004020
MA1051M

DN01, DN02
HD20022030
DS100C

ON03, ON04
HD20003210
IS2471

DU21
DU51~DU61
H110038030
SLP-281F

DU22~DU24
H110052030
SLP-2748

DU25
H110053030
SLP-1748

DU01~DU20
DU26~DU29
DU32
HD20015211
IS1133

DK01
HW10004320
PC-827

Q803
HT322401A0
25C2240(GR)

QL01
HC4066030C
LC4066H

Q801
HC10042050
TA7317P

Q802
HT109701A0
25A9701(GR)

Q853, Q854
HF203722A0
25K372(GR, BL)

Q801
HC10117050
TC9163N

Q802, Q805
HC10150030
LC4966










Q803
HC10118050
TC9176P

QU01
HC10169030
LC6502C

QU02
HC40110080
D40118C

QU51
HC10001260
MSM59371RS

Q803, Q804
HT32551100
25C2551(O)

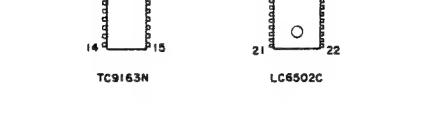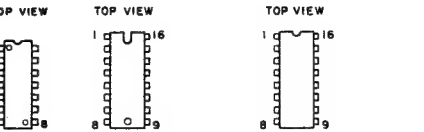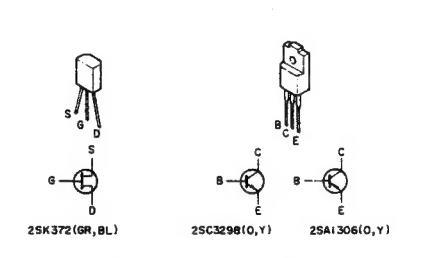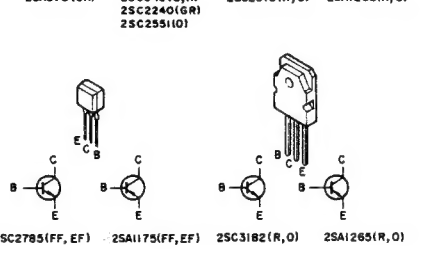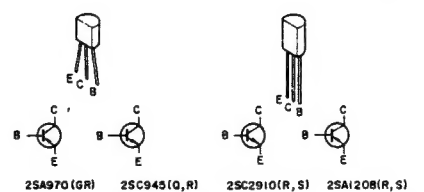

"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONNEL ONLY -
ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS A NON-WARRANTY
REPAIR BY ANY MARANTZ SERVICE CENTRE -"

Kind of Common Parts

RESISTOR

R*** (1) GD05 --- 140, Carbon film fixed resistor, $\pm 5\%$ 1/4W
R*** (2) GD05 --- 160, Carbon film fixed resistor, $\pm 5\%$ 1/6W

C*** : CERAMIC CAP.

(1) DD1 --- 370, Ceramic condenser,
disc type (titan condenser)
Temp. coeff. P350~N1000 50V

C*** : CERAMIC CAP.

(1) DK16 --- 300, High dielectric constant ceramic condenser,
disc type (titan variable)
Temp. chara. 2B4 50V

C*** : ELECTROLY CAP. (E) / FILM CAP. (F)

(1) EA --- 10, Electrolytic condenser,
one-way lead type, tolerance $\pm 20\%$
(2) DF15 --- 350, Plastic film condenser,
one-way type, Mylar, $\pm 5\%$ 50V

*In case of ordering the common parts, please establish the correct
parts number of 10 figures by the procedure "ASSIGNMENT OF
COMMON PARTS CODES"